



Description

Steel supply air valves painted white RAL 9010, with adjustable central cone.

Characteristics


Material: steel.

Finish: painted white RAL 9010.

Installation: by means of non-visible screws.


Use

Ceiling installation, directly on the duct, for air supply in service rooms, bathrooms and shops.

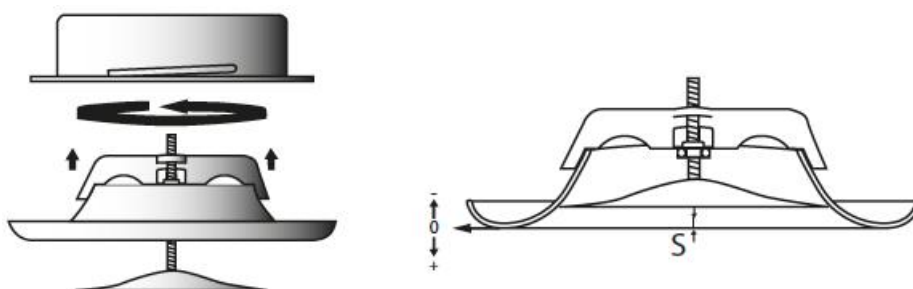

Dimensions:

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
EVVMC 80	116	80	38	105	79
EVVMC 100	140	93	38	125	99
EVVMC 125	166	112	45	150	124
EVVMC 150	203	137	50	175	149
EVVMC 160	210	148	50	186	159
EVVMC 200	250	195	56	225	199

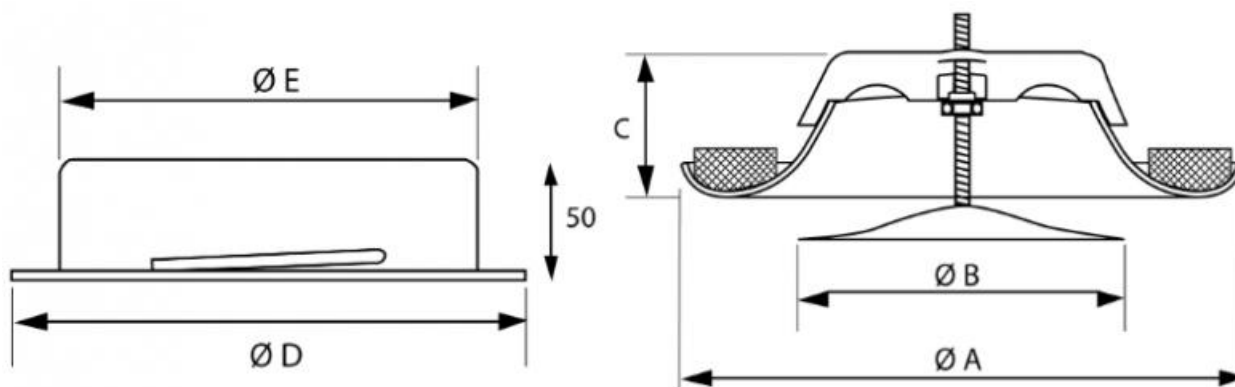

Operating data:

Vk: effective speed (m/s)

m³/h: flow rate

Pa: pressure drops in Pascal

L(m): air throw in metres calculated on ceiling installation, terminal velocity 0.25 m/s

dB(A): noise level

Model	m³/h	Opening "S" (mm)	Pressure drop (Pa)	dB(A)
EVVMC 80	60	6	36	23
		3	45	26
		0	68	31
	80	9	45	28
		6	60	30
		3	76	34
		0	120	37
	100	12	80	35
EVVMC 100	100	10	50	25
		5	90	28
		0	180	35
	125	10	70	28
		5	140	34
	150	10	100	33
EVVMC 125	130	5	200	38
		6	38	21
		3	48	24
		0	70	28
	160	-3	100	31
		6	55	27
		3	75	28
	190	0	110	34
		9	70	30
EVVMC 150 / 160	160	6	110	34
		5	46	22
		0	70	24
	190	-5	120	30
		5	70	25
		0	100	28
	220	-5	180	35
		10	55	24
		5	85	28
	250	0	130	32
		-5	180	35
		10	70	27
EVVMC 200	300	5	130	32
		0	180	35
		10	35	22
		0	65	32
	350	-5	88	30
		-10	140	36
		10	49	26
		0	100	34
	400	10	55	28
		0	120	35

Price list

Item normally available from stock	
model	euro
80	✓
100	✓
125	✓
150	✓
160	✓
200	✓