



Description :

Characteristics :


Material : steel.
Finish: painted white RAL 9010
Installation : by not apparent screws.

Use :

Used for air exhaust in shops, bathrooms and service spaces. Suitable for ceiling installation, directly on the duct.

Dimensions:

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
EVVRC 80	116	60	38	105	79
EVVRC 100	140	76	38	125	99
EVVRC 125	166	100	45	150	124
EVVRC 150	203	120	50	175	149
EVVRC 160	210	130	50	186	159
EVVRC 200	250	160	56	225	199

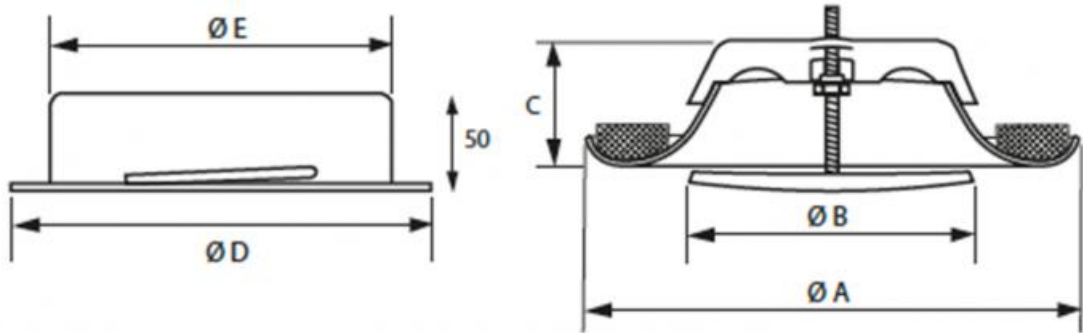

Dati di funzionamento:

Model	m³/h	Opening "S" (mm)	Pressure drop (Pa)	dB(A)
EVVRC 80	40	3	35	22
		0	80	31
		9	40	30
	60	6	55	32
		3	100	38
EVVRC 100	80	8	35	25
		6	55	30
		4	85	34
	100	10	58	33
		8	72	36
EVVRC 125	100	10	68	36
		6	35	23
		3	50	26
	140	0	90	34
		15	28	25
		12	34	27
		9	45	28
		6	65	33
	180	3	100	36
		15	45	32
		12	50	33
		9	70	35
EVVRC 150 / 160	160	10	25	20
		5	42	23
		2	70	30
		0	90	35
	200	10	40	24
		5	68	30
		2	95	35
	250	15	38	26
		10	59	30
EVVRC 200	300	5	95	36
		20	25	25
		15	35	27
		12	50	30
		9	68	32
	350	6	100	35
		20	35	30
		15	55	33
		12	70	35
	400	20	50	34
		15	65	36

Price list:

Item normally available from stock	
model	euro
80	✓
100	✓
125	✓
150	✓
160	✓
200	✓