

EACST-2M EACSTN-2M Collari di sostegno per staffaggio canali circolari



Descrizione






Collare per sostegno canali in lamiera zincata a 2 pz. con dado sia M8 che M10.

Caratteristiche

Collars with diameter ≤ 400 mm are manufactured from 1.5 mm thick sheet metal.

Collars with diameter > 400 mm are manufactured from 2.5 mm thick sheet metal.

The load rating is based on a 5:1 safety factor and refers to a vertical suspension installation (WLL).

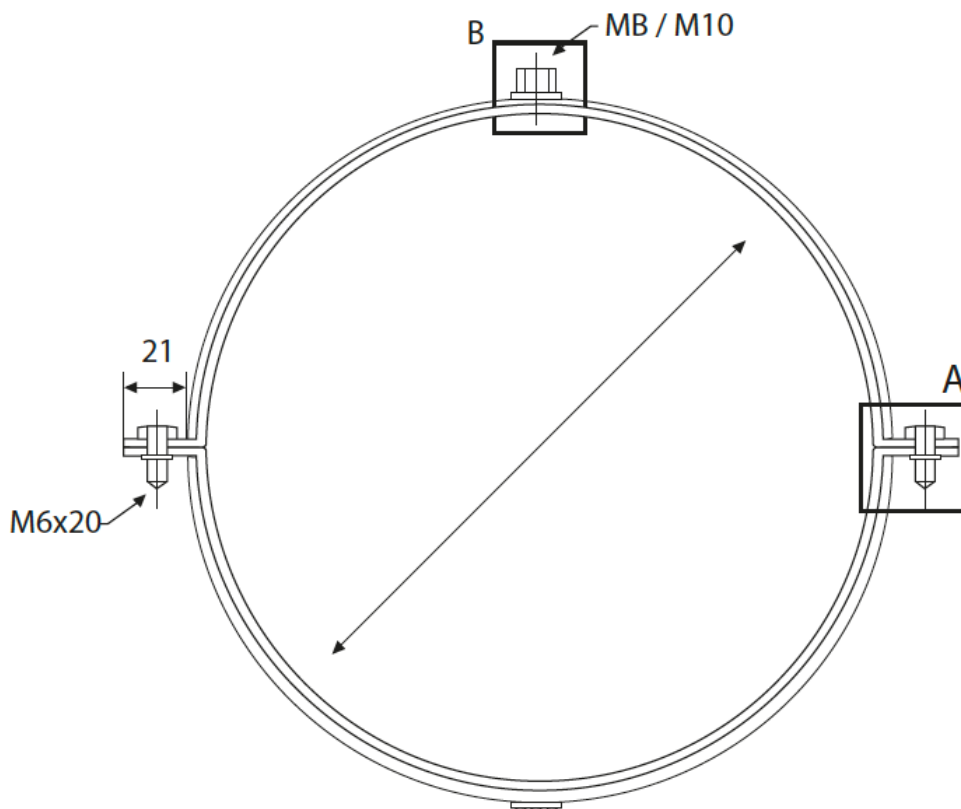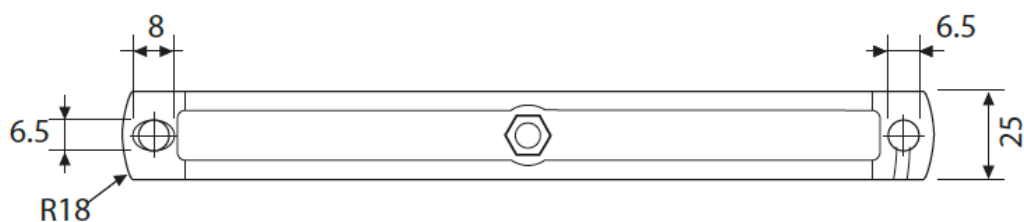

Price List

Models	EACST-2M	EACSTN-2M
	Duct Collar Without Gasket	Duct Collar With Gasket
	Eur	Eur
80	-	-
100	-	-
125	-	-
150	-	-
160	-	-
180	-	-
200	-	-
250	-	-
300	-	-
315	-	-
355	-	-
400	-	-
450	-	-
500	-	-
560	-	-
600	-	-
630	-	-
710	-	-
800	-	-
900	-	-
1000	-	-
1120	-	-
1250	-	-