

EACST-2M EACSTN-2M Collari di sostegno per staffaggio canali circolari



Descrizione






Collare per sostegno canali in lamiera zincata a 2 pz. con dado sia M8 che M10.

Caratteristiche

Collars with diameter ≤ 400 mm are manufactured from 1.5 mm thick sheet metal.

Collars with diameter > 400 mm are manufactured from 2.5 mm thick sheet metal.

The load rating is based on a 5:1 safety factor and refers to a vertical suspension installation (WLL).

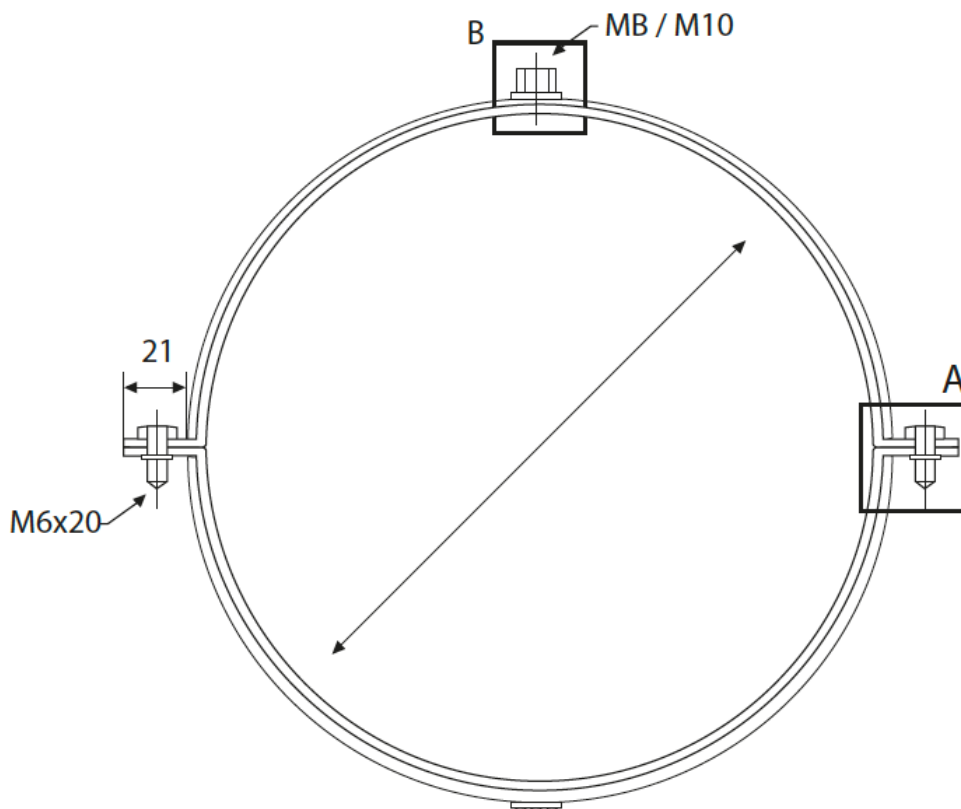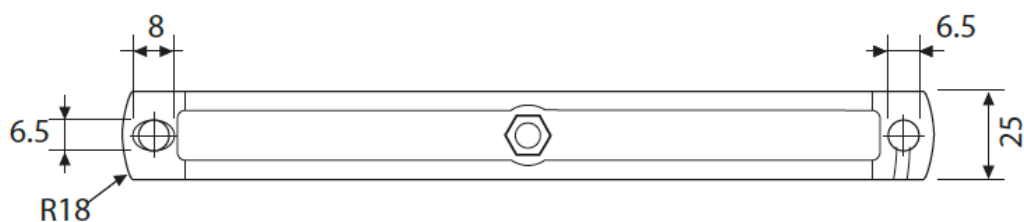

Price List

Models	EACST-2M	EACSTN-2M
	Duct Collar Without Gasket	Duct Collar With Gasket
	Eur	Eur
80	4,93	6,06
100	5,13	6,45
125	5,87	7,49
150	6,45	8,54
160	6,92	9,09
180	7,58	10,52
200	8,15	11,28
250	10,81	13,75
300	11,56	16,69
315	12,03	17,16
355	13,08	18,39
400	15,83	23,88
450	20,86	28,62
500	22,63	31,64
560	25,77	34,95
600	28,62	37,34
630	29,47	37,80
710	34,95	43,49
800	38,78	50,71
900	48,80	69,19
1000	54,88	79,89
1120	83,32	121,60
1250	85,56	125,57