


# ERBR Anti-vibration rubber supports

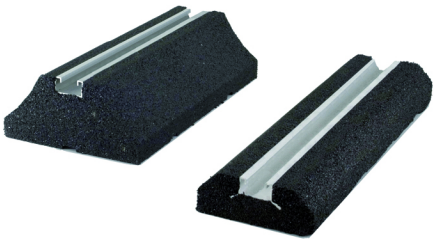

## Description

The ERBR system provides superior vibration isolation and optimal load distribution for rooftop HVAC equipment installations.

Manufactured from recycled rubber with integrated molded aluminum rails, these support blocks deliver excellent performance while ensuring environmental sustainability.

## Use

Ideal for supporting air handling units, condensing units, exhaust fans, and other vibrating equipment installed on rooftops that require reliable vibration isolation and structural protection.

## Characteristics

Each unit is equipped with a precision-molded aluminum rail (41 × 21 mm), optimized for M10 fasteners, ensuring reliable mechanical connections. The robust design operates effectively over a wide temperature range from -30 °C to +80 °C, making it suitable for various climatic conditions.

Complete solution including hardware:

- 4 rail bolts (M10 × 30 mm);
- 4 nuts and washers;
- Ready-to-install configuration.

## Dimensions and Price List

| Models       | Dimensions |       |            | Maximum Load | Recommended Temperature | Eur    |
|--------------|------------|-------|------------|--------------|-------------------------|--------|
|              | Height     | Width | Lenght (m) |              |                         |        |
|              | mm         | mm    | mm         | kg           |                         |        |
| ERBR 50-250  | 50         | 140   | 250        | 50           | -30°C / +80°C           | 62,30  |
| ERBR 50-400  | 50         | 140   | 400        | 100          | -30°C / +80°C           | 81,17  |
| ERBR 95-250  | 95         | 200   | 250        | 100          | -30°C / +80°C           | 71,29  |
| ERBR 95-400  | 95         | 200   | 400        | 200          | -30°C / +80°C           | 105,87 |
| ERBR 95-600  | 95         | 200   | 600        | 300          | -30°C / +80°C           | 142,84 |
| ERBR 95-1000 | 95         | 200   | 1000       | 500          | -30°C / +80°C           | 245,54 |