

EVVMC - EVVMB Supply steel air valves



Description

Steel supply air valves painted white, with adjustable central cone.

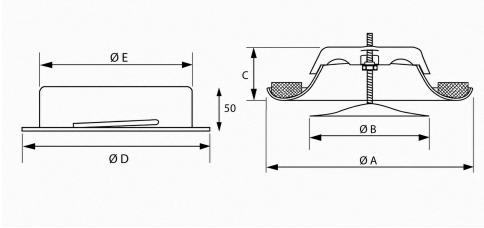
Use

Ceiling installation, directly on the duct, for air supply in service rooms, bathrooms and shops.

Characteristics


Material: steel.
Finish EVVMC: painted white RAL 9010.
Finish EVVMB: painted white RAL 9016.
Installation: by means of non-visible screws.

Dimensions

Technical Drawing	Models	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
	EVVMC - EVVMB 80	116	80	38	105	79
	EVVMC - EVVMB 100	140	93	38	125	99
	EVVMC - EVVMB 125	166	112	45	150	124
	EVVMC - EVVMB 150	203	137	50	175	149
	EVVMC - EVVMB 160	210	148	50	186	159
	EVVMC - EVVMB 200	250	195	56	225	199

Operating Data

- V_k : effective speed (m/s).
- m^3/h : flow rate.
- Pa: pressure drops in Pascal.
- L(m): air throw in metres calculated on ceiling installation, terminal velocity 0.25 m/s.
- dB(A): noise level.

Models				
	m^3/h	Apertura "S" (mm)	Pressure Drop (Pa)	dB(A)
EVVMC - EVVMB 80	60	6	36	23
		3	45	26
		0	68	31
	80	9	45	28
		6	60	30
		3	76	34
		0	120	37
	100	12	80	35
EVVMC - EVVMB 100	100	10	50	25
		5	90	28
		0	180	35
	125	10	70	28
		5	140	34
	150	10	100	33
		5	200	38
EVVMC - EVVMB 125	130	6	38	21
		3	48	24
		0	70	28
		-3	100	31
	160	6	55	27
		3	75	28
		0	110	34
	190	9	70	30
		6	110	34

EVVMC - EVVMB 150 / 160	160	5	46	22
		0	70	24
		-5	120	30
	190	5	70	25
		0	100	28
		-5	180	35
	220	10	55	24
		5	85	28
		0	130	32
		-5	180	35
	250	10	70	27
		5	130	32
		0	180	35
EVVMC - EVVMB 200	300	10	35	22
		0	65	32
		-5	88	30
		-10	140	36
	350	10	49	26
		0	100	34
	400	10	55	28
		0	120	35

Price List

Models	EVVMC - RAL9010	EVVMB - RAL9016
	Eur	Eur
80	-	-
100	-	-
125	-	-
150	-	-
160	-	-
200	-	-