

ETIM Induction duct



Description

Circular section induction ducts. The perforations along the length of the duct provide a strong inductive effect, generating micro-vortices and consequently an optimal mixing of the supplied air. Standard ducts are circular and are made in 1-meter sections with 90° coupling flanges and reinforcements at the ends. The perforations are distributed along the duct length and are created with specific diameters and geometries for each system and according to the environmental context. The large number of possible configurations makes the induction system a versatile solution for many applications in both civil and industrial settings.

On request

- ETIM-D version: semi-circular ducts with reduced transport costs, connected by interlocking modules;
- Powder-coated sheet metal with customizable RAL color;
- In stainless steel 304, 316 or copper;
- Anti-condensation treatment applicable to the above surfaces;
- ETIM-O version: open ducts to reduce transport and assembly costs using the 10 seconds system.

Features

- Duct made of galvanized steel sheet DX51D with thicknesses: - Ø 150-500 mm: 0.6 mm (0.8 mm on request); - Ø 600-900 mm: 0.8 mm; - Ø 1000-1400 mm: 1.0 mm;
- Length: 1 meter;
- Coupling with 90° flanges and reinforcement;
- Joints using omega clamps;
- Installation height: - 2.5 m to 3.5 m (SYSTEM A) - 3.5 m to 10 m (SYSTEM B) - 9 m to 18 m (SYSTEM C)


Quotazione a richiesta.

System A

Central installation for spaces with a height from 2.5 m to 3.5 m. Suitable for habitable environments such as offices, shops.

H = 3 m;

L = 7 m;

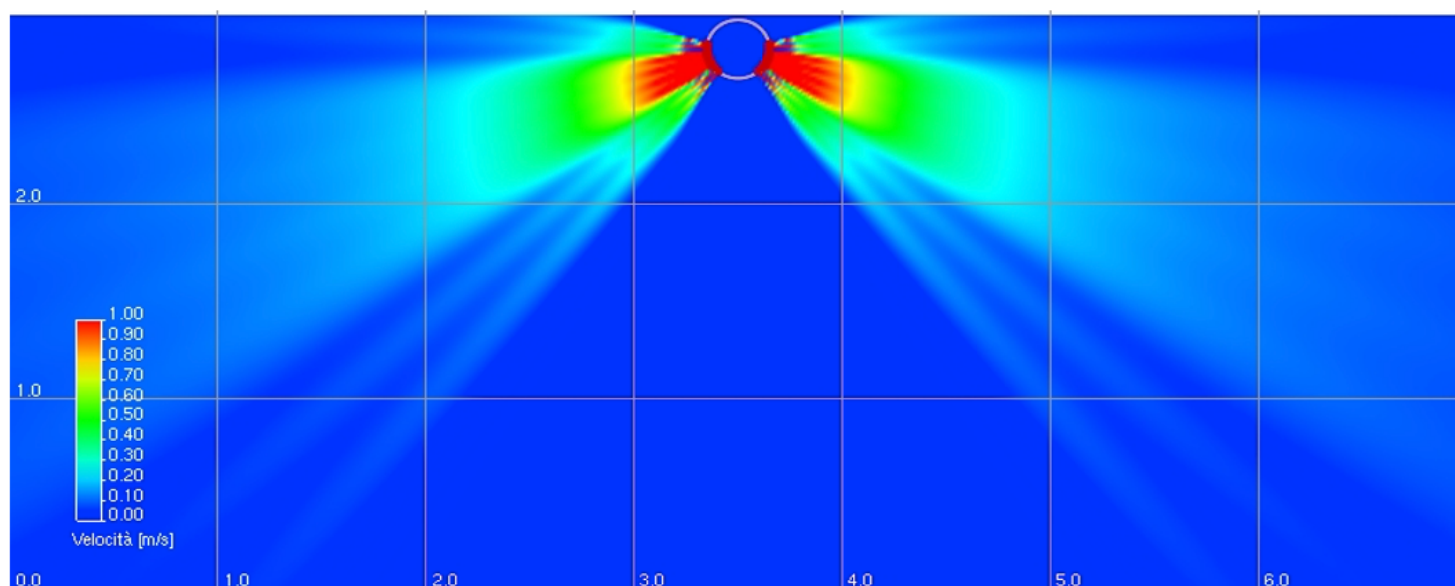


System B

Central installation for environments with height from 3.5 m to 10 m. Suitable for both civil and industrial settings.

H = 9 m;

L = 18 m;

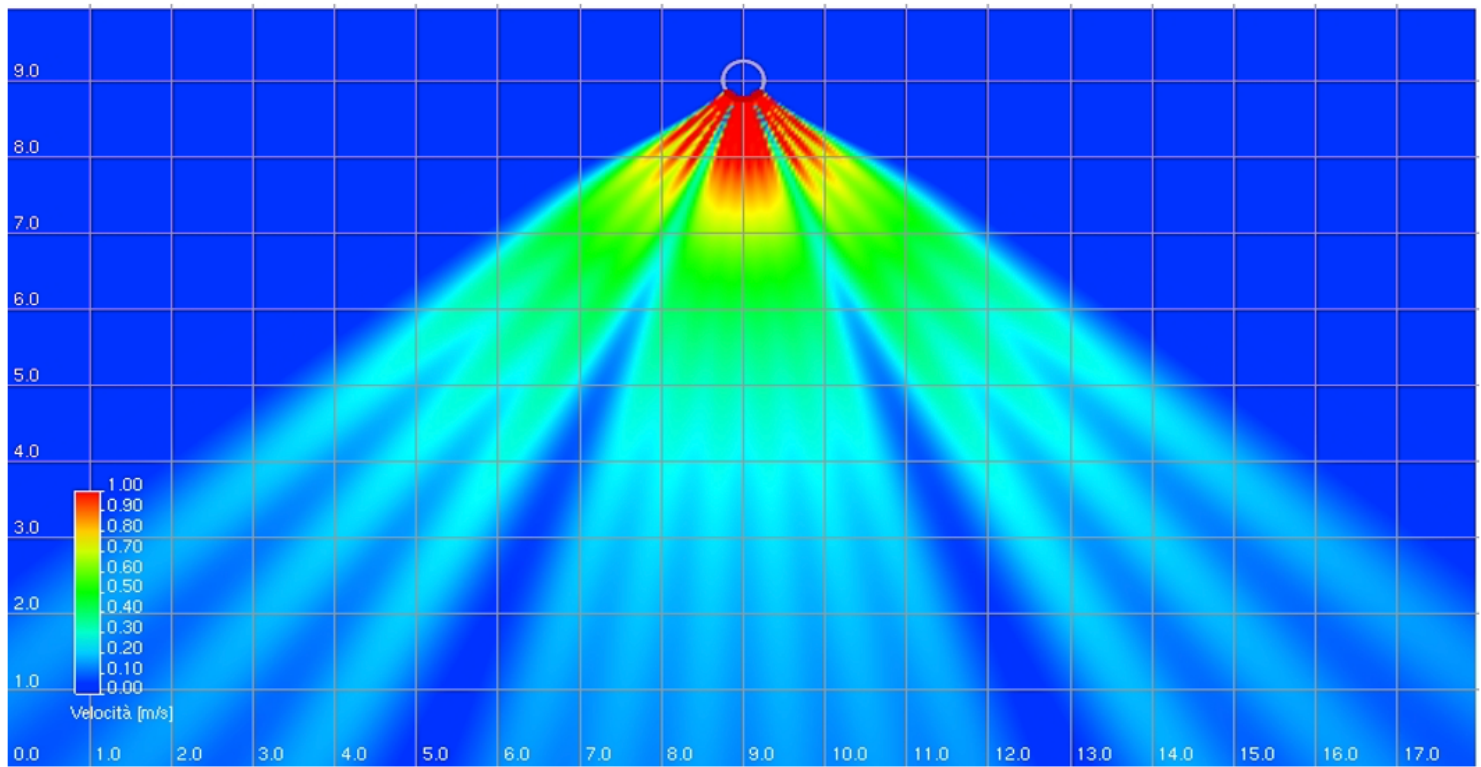


System C

Asymmetrical diffusion installation to create thermal barriers for glass surfaces, etc.

H = 9 m;

L = 18 m;

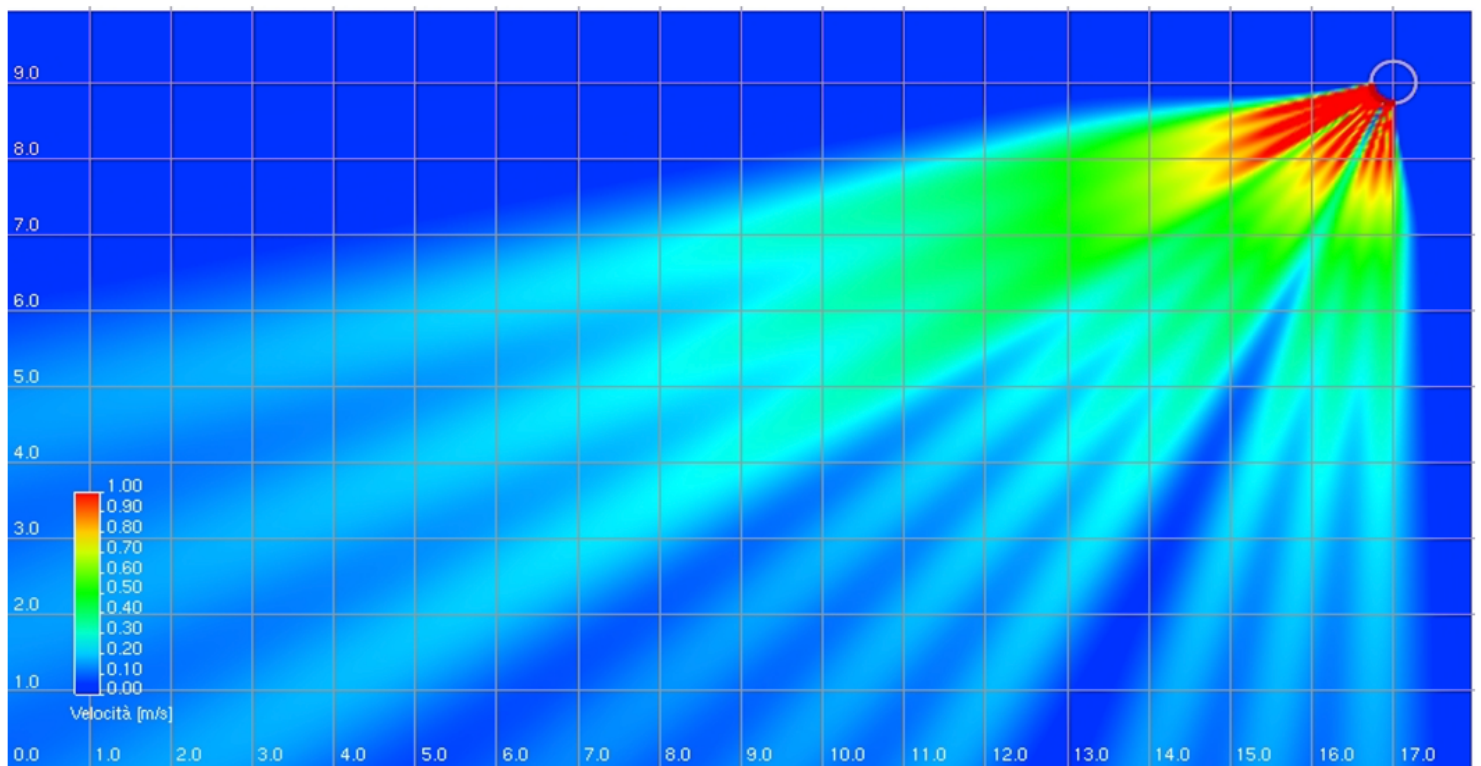

N.B. Diagrams simulated with residual speed 0.2 m at 1800 mm from the ground in a more conservative way than UNI 10339 and UNI EN 13779.

Pressure Drop in Circular Duct

The limit of use of the metal induction tube is with speeds between approximately 3.5 and 7 m/s.

Ø	200	300	400	500	600	700	800	900	1000	1100
Air Flow Rate (m³/h)	Pa/m									
500	10									
600	21									
700	32									
800	38									
1100		10								
1200		14								
1300		17								
1400		21								
1500		25								
1600		29								
1700		33								
1800		38	10							
1900			12							
2000			18							
2250			22							
2500			25							
2750			31							
3000			36	17						
3250			43	21						
3500				24						
3750				27	10					
4000				31	12					
4500				40	17					
5000				43	21	12				
5500					25	15				
6000					29	17	10			
6500					34	21	12			
7000					39	24	15			
8000						30	20	14		
9000						36	24	18	10	

[illegible]