

EGA Exhaust aluminium grilles 25 mm pitch



Description

Aluminium exhaust grilles with horizontal fixed bars with 45° inclination.

Characteristics

Material: aluminium.

Finish: natural anodised.

Installation: clip fastening.

Dimensions achievable in one piece: - min. base 100 mm x height 100 mm; - max. base 1500 mm x height 1000 mm.

Use

Recommended for air exhaust, can be installed both inside and outside civil and industrial environments.

Models

- EGA Aluminium exhaust grilles 25 mm pitch.
- EGA 595x595 false ceiling version dim. 595x595 mm (external frame).

Accessories

- EPZ - Galvanised Plenum Box;
- EPI - Insulated Plenum Box;
- SC - Galvanised steel regulation damper with blades with opposing movement;
- CT - Galvanised steel counter-frame to set into wall.

On request

- White RAL9016 painting or other RAL colours;
- With bird mesh;
- With mosquito mesh;
- Holes on frame for installation with screws.

Dimensions

Technical Drawing		
EGA	EGA	EGA+SC

Cut-Out Dimensions (Optional)

Screw Fixing Holes (Optional).	Technical Drawing
Upon request, the grilles can be supplied with Ø4.5 mm fixing holes, pre-drilled in the frame according to the specified dimensions, allowing quick, secure, and stable installation using screws.	

Effective Cross-section

All dimensions are expressed in mm.

H	L							
	200	300	400	500	600	800	1000	1200
	Effective Cross-Section (m2)							
100	0,009	0,014	0,019	0,024	0,029	0,039	0,049	0,059
200	0,019	0,030	0,040	0,050	0,061	0,081	0,102	0,123
300	0,029	0,045	0,061	0,076	0,092	0,124	0,155	0,187
400	0,039	0,060	0,081	0,102	0,123	0,166	0,208	0,250
500	0,049	0,075	0,102	0,128	0,155	0,208	0,261	0,314
600	0,059	0,091	0,123	0,154	0,186	0,250	0,313	0,377
800	0,079	0,121	0,164	0,206	0,249	0,334	0,419	0,504
1000	0,099	0,152	0,205	0,258	0,312	0,418	0,525	0,631

Operating Data

- Vk: effective speed (m/s).
- m³/h: flow rate.
- Pa: pressure drops in Pascal.
- dB(A): noise level.
- L: base. H: height.

All dimensions are expressed in mm.

H	Vk	L							
		200	300	400	500	600	800	1000	1200
	m/s	m³/h							
100	4	130	200	275	346	420	560	705	850
	6	195	300	410	520	625	840	1060	1275
	8	260	400	545	691	835	1120	1410	1700
200	4	275	430	575	720	880	1165	1470	1770
	6	410	650	860	1080	1320	1750	2203	2660
	8	545	865	1150	1440	1760	2335	2940	3542
300	4	420	650	880	1095	1325	1785	2230	2695
	6	625	970	1320	1640	1990	2680	3350	4040
	8	835	1295	1760	2190	2650	3570	4465	5385
400	4	560	865	1165	1470	1770	2390	2995	3600
	6	840	1295	1750	2200	2655	3585	4495	5400
	8	1120	1730	2335	2940	3540	4780	5990	7200
500	4	705	1080	1470	1845	2230	2995	3760	4520
	6	1060	1620	2200	2765	3350	4495	5640	6780
	8	1410	2160	1940	3685	4465	5990	7515	9040
600	4	850	1310	1770	2220	2680	3600	4505	5430
	6	1275	1965	2660	3325	4020	5400	5760	8140
	8	1700	2620	3545	4435	5360	7200	9015	10860
800	4	1140	1740	2360	2965	3585	4810	6035	7260
	6	1705	2615	3540	4450	5380	7210	9050	10885
	8	2275	3485	4725	5930	7170	9620	12065	14515
1000	4	1430	2190	2950	3715	4490	6020	7560	9085
	6	2140	3280	4430	5570	6740	9030	11340	13630
	8	2850	4380	5905	7430	8985	12040	15120	18170

Noise Level dB(A)

Vk m/s	dB(A)
4	25/30
6	35/45
8	45/50


Pressure Drop (Pa)


Vk m/s	Pa
4	16
6	45
8	80

Accessories

SC - Volume Damper

This accessory allows the airflow supplied through the diffuser to be reduced, ensuring accurate airflow balancing. The damper is attached to the diffuser using the clips supplied with the diffuser. Opposed-blade balancing damper manufactured from galvanized steel. Maximum one-piece construction dimensions (L x H): 1000 x 600 mm.

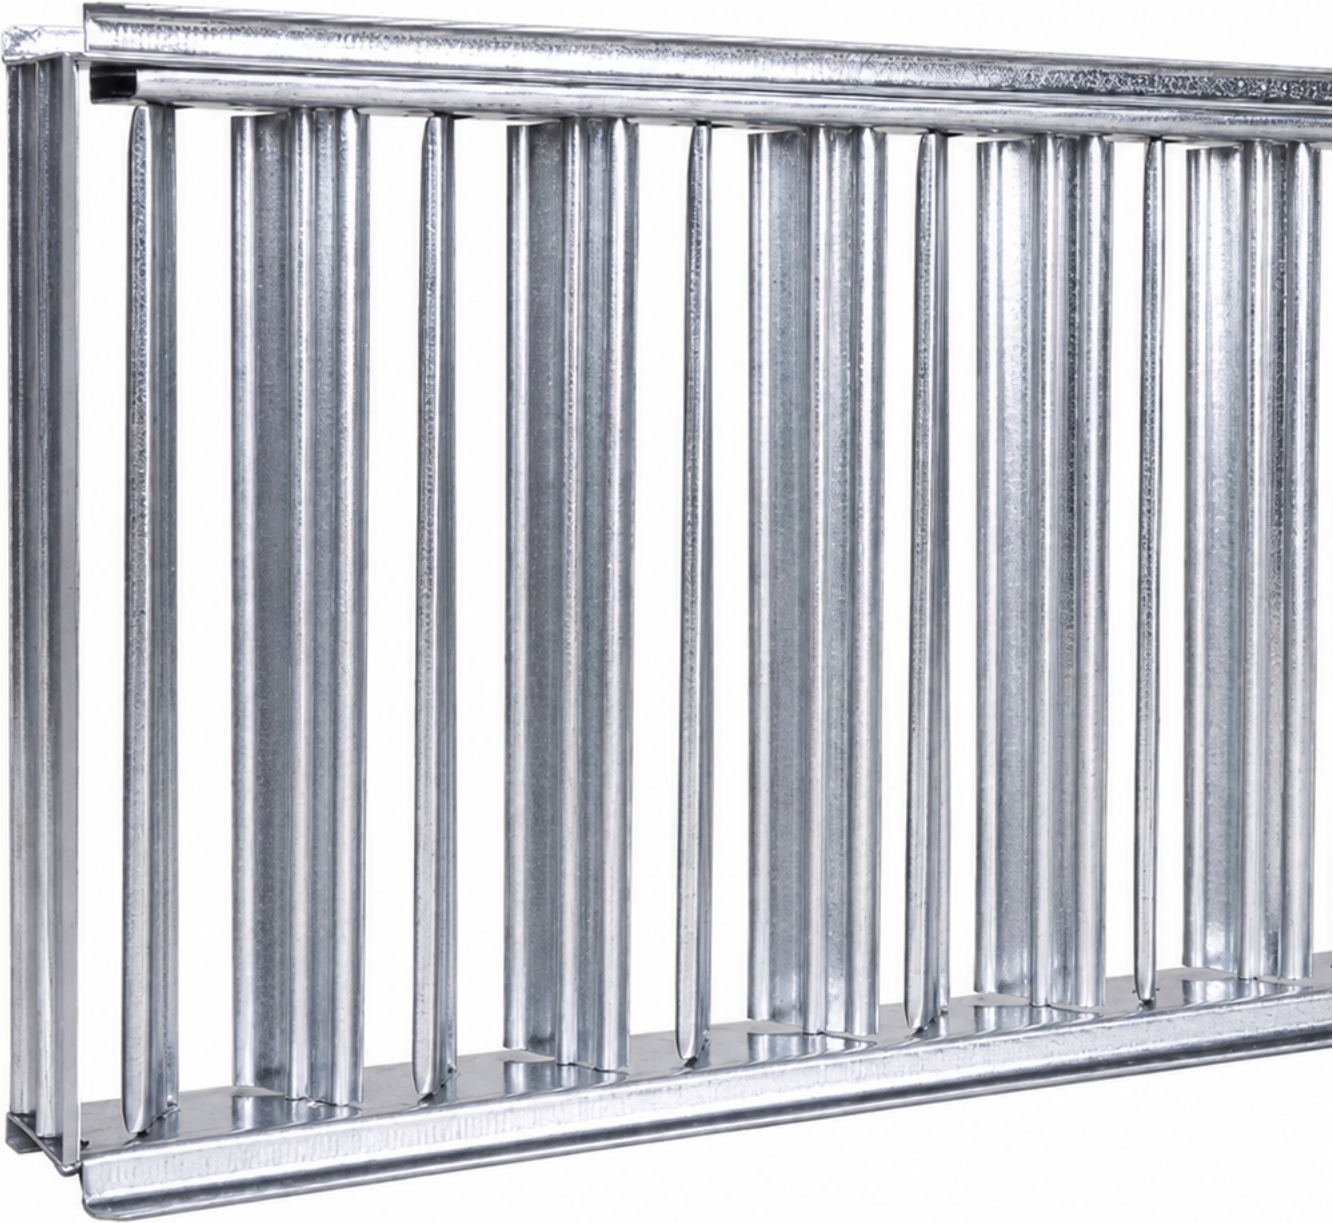

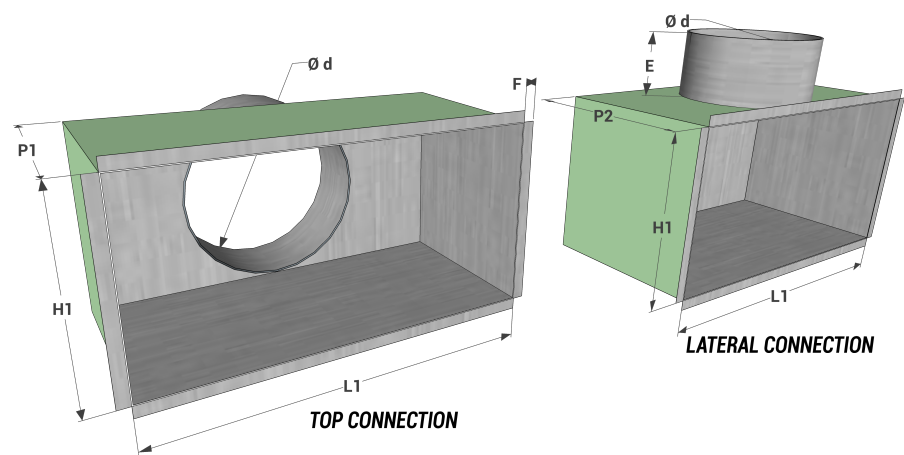

All measurements are expressed in mm.

Models L1 x H1	Top Connection			Lateral Connection			E	F	Models L1 x H1	Top Connection			Lateral Connection			E	F
	P1	Nr. Connections	Ø d	P2	Nr. Connections	Ø d				P1	Nr. Connections	Ø d	P2	Nr. Connections	Ø d		
200x100	200	1	98	200	1	98	80	12	1000x200	200	2	198	300	2	198	80	12
300x100	200	1	98	200	1	98	80	12	300x300	200	1	248	350	1	248	80	12
400x100	200	2	98	200	2	98	80	12	400x300	200	1	248	350	1	248	80	12
500x100	200	2	98	200	2	98	80	12	500x300	200	1	248	350	1	248	80	12
600x100	200	2	98	200	2	98	80	12	600x300	200	2	198	350	2	248	80	12
800x100	200	2	98	200	2	98	80	12	800x300	200	2	248	350	2	248	80	12
200x200	200	1	198	300	1	198	80	12	1000x300	200	2	248	350	2	248	80	12
300x200	200	1	198	300	1	198	80	12	400x400	200	1	298	350	1	298	80	12
400x200	200	1	198	300	1	198	80	12	500x400	200	1	298	350	1	298	80	12
500x200	200	1	198	300	1	198	80	12	600x400	200	2	198	350	2	248	80	12
600x200	200	2	198	300	2	198	80	12	800x400	200	2	298	350	2	298	80	12
800x200	200	2	198	300	2	198	80	12	1000x400	200	2	298	400	2	298	80	12
560x560	-	-	-	300	1	248	80	12									

Price List

Notes:

- with bird mesh + 20%;
- painted white RAL 9016 + 20%;
- mosquito mesh price on request;
- drip tile + 10%.

EGA								
H	L							
	200	300	400	500	600	800	1000	1200
	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	17,27	20,00	24,54	29,10	32,71	40,00	51,80	59,06
150	20,91	23,63	28,14	34,54	40,89	48,15	55,42	66,34
200	22,73	28,14	30,91	39,07	49,97	57,26	67,24	76,35
300	28,14	34,54	41,80	51,80	61,81	75,43	90,89	107,24
400	33,34	43,62	56,35	67,24	76,35	97,23	110,12	134,50
500	40,89	53,62	69,98	77,24	90,89	115,41	139,03	167,19
600	51,80	64,53	79,07	92,70	107,24	134,50	167,19	189,01
800	59,06	79,07	105,40	118,15	138,13	171,74	214,44	248,99
1000	73,84	98,83	131,79	147,70	172,66	214,68	268,04	311,24

Models	Overall Frame Dimensions	Dimensions L x H	Description	Euro
EGA	595 x 595	560 x 560	Version for installation in 600 mm x 600 mm modular suspended ceilings.	92,02

Accessories

SC - Volume Damper								
H	L							
	200	300	400	500	600	800	1000	1200
	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	14,15	15,41	18,44	22,01	25,18	31,65	38,83	50,35
150	15,61	18,06	21,28	24,64	28,08	35,96	43,34	56,15
200	17,10	23,98	26,32	30,92	35,62	43,65	48,71	71,24
300	23,98	29,76	36,84	40,56	44,34	53,79	64,85	88,67
400	26,32	36,84	42,19	50,96	54,78	67,03	79,54	109,56
500	30,92	40,56	50,96	65,57	68,36	81,30	102,61	136,73
600	35,62	44,34	54,78	68,36	81,41	98,17	122,80	162,82
800	43,65	53,79	67,03	81,30	98,17	134,05	159,08	196,33
1000	48,71	64,85	79,54	102,61	122,80	159,08	205,43	245,61

CT - Mounting-frame								
H	L							
	200	300	400	500	600	800	1000	1200
	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	15,12	15,12	16,79	18,47	20,19	24,19	27,59	36,97
150	15,12	16,79	18,47	22,16	24,19	27,59	31,31	a.r.
200	16,79	18,47	21,35	24,19	25,91	31,31	34,92	40,33
300	18,47	22,16	25,91	29,57	31,31	36,97	42,05	45,71
400	21,35	25,91	29,57	32,97	36,97	42,05	47,69	51,05
500	24,19	29,57	32,97	36,97	40,33	46,09	51,48	56,86
600	25,91	31,31	36,97	40,33	44,03	49,40	57,13	62,21
800	31,31	36,97	42,05	46,09	49,40	57,13	64,21	71,22
1000	34,92	42,05	47,69	51,48	57,13	64,21	80,29	a.r.

Plenum

Dimensions	Top Connection		Lateral Connection	
	EPZ - Plenum Box	EPI - Insulated Plenum Box	EPZ - Plenum Box	EPI - Insulated Plenum Box
L1xH1	Eur	Eur	Eur	Eur
200x100	31,29	43,48	31,29	43,48
300x100	33,85	46,96	33,85	46,96
400x100	44,84	59,19	44,84	59,19
500x100	47,43	62,67	47,43	62,67
600x100	50,03	66,14	50,03	66,14
800x100	55,23	73,13	55,23	73,13
1000x100	52,00	71,34	69,06	94,64
200x200	35,61	48,96	39,36	54,00
300x200	38,65	53,03	43,37	59,35
400x200	41,72	57,15	47,32	64,67
500x200	44,76	61,27	51,31	69,98
600x200	62,39	81,21	74,86	95,68
560x560	-	-	94,75	128,01

Dimensions	Top Connection		Lateral Connection	
	EPZ - Plenum Box	EPI - Insulated Plenum Box	EPZ - Plenum Box	EPI - Insulated Plenum Box
L1xH1	Eur	Eur	Eur	Eur
800x200	73,54	93,88	82,80	106,39
1000x200	79,65	102,12	79,65	117,02
300x300	42,85	58,39	51,24	69,74
400x300	57,55	74,78	67,34	87,92
500x300	61,07	79,49	72,22	94,52
600x300	72,30	92,24	80,69	103,51
800x300	88,37	116,90	103,71	137,48
1000x300	95,40	126,33	113,51	150,59
400x400	62,15	80,81	77,05	100,84
500x400	66,14	86,09	82,89	108,63
600x400	85,60	113,34	94,88	125,85
800x400	103,23	134,13	119,93	156,51
1000x400	122,38	159,31	148,36	194,16