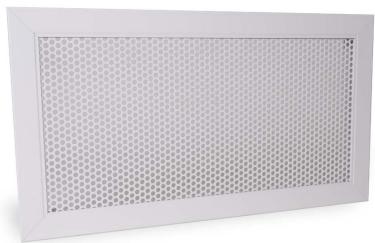


EGF Perforated grilles



Description

Air supply and exhaust grilles with perforated panel.

Characteristics

Aluminium perimeter frame.

Galvanised steel panel.

Finish: painted white RAL 9016.

Installation: clip fastening.

The perforated mesh is made according to the following specifications:

- 60° alternating round holes;
- empty/full ratio 46%;
- diameter of holes 5mm;
- distance between centres 7mm.

Use

For air exhaust in rooms.

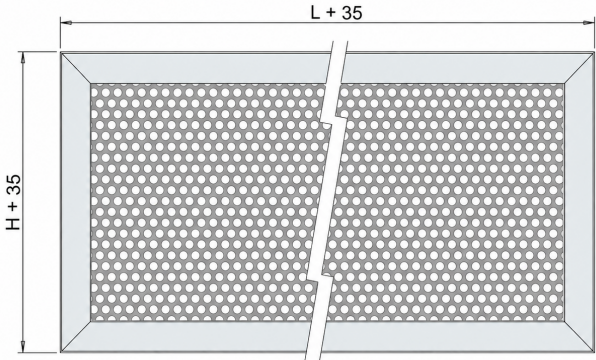
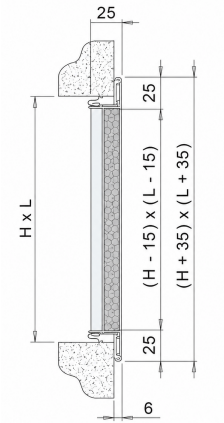

Accessories

- EPZ - Galvanised Plenum Box;
- EPI - Insulated Plenum Box;
- SC - Galvanised steel regulation damper with blades with opposing movement;
- CT - Galvanised steel counter-frame to set into wall.

On request

- Version with filter-holder counter-frame;
- Painting in different RAL colours;
- Holes on frame for installation with screws.

Dimensions

Technical Drawing		
Front View	EGF	Screw Fixing Holes
		

Effective Cross-section

H	L					
	300	400	500	600	800	1000
	Effective Cross-Section (m2)					
200	0,024	0,033	0,041	0,050	0,067	0,084
300	0,037	0,050	0,064	0,077	0,103	0,129
400	0,050	0,068	0,086	0,104	0,139	0,174
500	0,064	0,086	0,108	0,131	0,175	0,220
600	0,077	0,104	0,131	0,157	0,211	0,265

Operating Data

- m³/h: flow rate.
- Pa: pressure drops in Pascal.
- dB(A): noise level.
- L: width. H: height.

All dimensions are expressed in mm.

H	Vk m/s	L					
		300	400	500	600	800	1000
		Flow Rate (m³/h)					
200	2	175	236	297	358	481	604
	3	262	354	446	538	721	905
	4	349	472	594	717	962	1207
300	2	269	363	458	552	740	930
	3	404	545	687	828	1110	1395
	4	538	727	916	1104	1482	1860
400	2	363	491	618	746	1000	1256
	3	545	736	928	1119	1500	1884
	4	727	982	1237	1492	2000	2512
500	2	458	618	779	940	1260	1582
	3	687	928	1169	1410	1890	2373
	4	916	1237	1558	1879	2522	3164
600	2	552	746	940	1133	1520	1908
	3	828	1119	1410	1700	2280	2863
	4	1104	1492	1879	2267	3042	3817

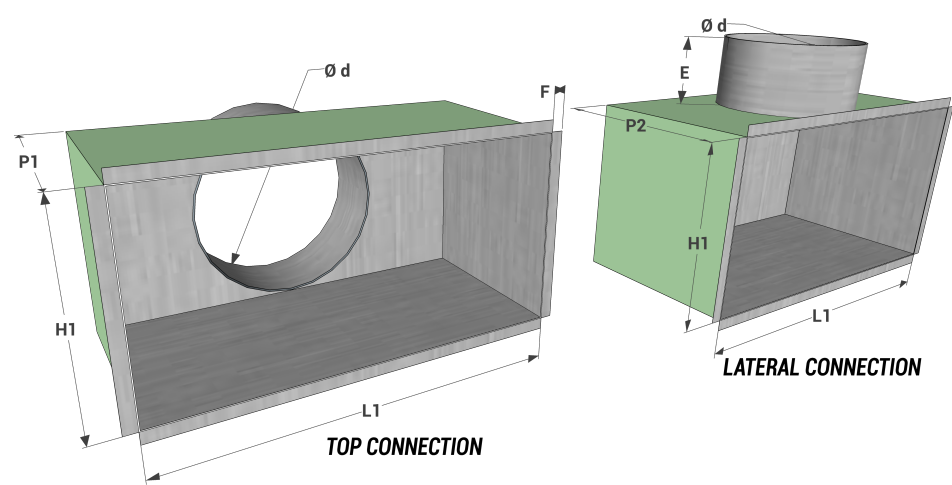
Noise Level dB(A) - Pressure Drop (Pa)

V m/s	dB(A)	Pa
2	20/25	15
3	25/30	40
4	35/40	70

Accessories

SC - Volume Damper	CT - Mounting-frame
This accessory allows the airflow supplied through the diffuser to be reduced, ensuring accurate airflow balancing. The damper is attached to the diffuser using the clips supplied with the diffuser. Opposed-blade balancing damper manufactured from galvanized steel. Maximum one-piece construction dimensions (L × H): 1000 × 600 mm.	Galvanised steel counter-frames for air jets and grilles. The counter-frames are equipped with special brackets that are bent during installation to anchor them to the walls.
	

Plenum Box



Models L1 x H1	Top Connection			Lateral Connection			E	F
	P1	Nr. Connections	Ø d	P2	Nr. Connections	Ø d		
300x200	200	1	200	300	1	200	80	12
400x200	200	1	200	300	1	200	80	12
500x200	200	1	200	300	1	200	80	12
600x200	200	2	200	300	2	200	80	12
800x200	200	2	200	300	2	200	80	12
1000x200	200	2	200	300	2	200	80	12
300x300	200	1	248	350	1	248	80	12
400x300	200	1	248	350	1	248	80	12
500x300	200	1	248	350	1	248	80	12
600x300	200	2	198	350	2	248	80	12
800x300	200	2	248	350	2	248	80	12
1000x300	200	2	248	350	2	248	80	12
400x400	200	1	298	350	1	298	80	12
500x400	200	1	298	350	1	298	80	12
600x400	200	2	198	350	2	248	80	12
800x400	200	2	298	350	2	298	80	12
1000x400	200	2	298	400	2	298	80	12

EGF - Price List

H	L					
	300	400	500	600	800	1000
	Eur	Eur	Eur	Eur	Eur	Eur
200	48,88	55,09	61,87	68,50	80,77	89,62
300	51,94	58,54	65,76	72,79	85,84	98,34
400	58,54	67,27	76,40	84,97	100,06	115,02
500	65,76	76,40	85,84	95,61	113,44	130,10
600	72,79	84,97	95,61	106,09	126,48	145,06

SC - Volume Damper						
H	L					
	300	400	500	600	800	1000
	Eur	Eur	Eur	Eur	Eur	Eur
200	23,98	26,32	30,92	35,62	43,65	48,71
300	29,76	36,84	40,56	44,34	53,79	64,85
400	36,84	42,19	50,96	54,78	67,03	79,54
500	40,56	50,96	65,57	68,36	81,30	102,61
600	44,34	54,78	68,36	81,41	98,17	122,80

CT - Mounting-frame						
H	L					
	300	400	500	600	800	1000
	Eur	Eur	Eur	Eur	Eur	Eur
200	18,47	21,35	24,19	25,91	31,31	34,92
300	22,16	25,91	29,57	31,31	36,97	42,05
400	25,91	29,57	32,97	36,97	42,05	47,69
500	29,57	32,97	36,97	40,33	46,09	51,48
600	31,31	36,97	40,33	44,03	49,40	57,13

Plenum

Dimensions	Top Connection		Lateral Connection	
	EPZ - Plenum Box	EPI - Insulated Plenum Box	EPZ - Plenum Box	EPI - Insulated Plenum Box
L1xH1	Eur	Eur	Eur	Eur
300x200	38,65	53,03	43,37	59,35
400x200	41,72	57,15	47,32	64,67
500x200	44,76	61,27	51,31	69,98
600x200	62,39	81,21	74,86	95,68
800x200	73,54	93,88	82,80	106,39
1000x200	79,65	102,12	79,65	117,02
300x300	42,85	58,39	51,24	69,74
400x300	57,55	74,78	67,34	87,92
500x300	61,07	79,49	72,22	94,52
600x300	72,30	92,24	80,69	103,51
800x300	88,37	116,90	103,71	137,48
1000x300	95,40	126,33	113,51	150,59
400x400	62,15	80,81	77,05	100,84
600x400	85,60	113,34	94,88	125,85
800x400	103,23	134,13	119,93	156,51
1000x400	122,38	159,31	148,36	194,16