


EGFF Perforated grilles without frame

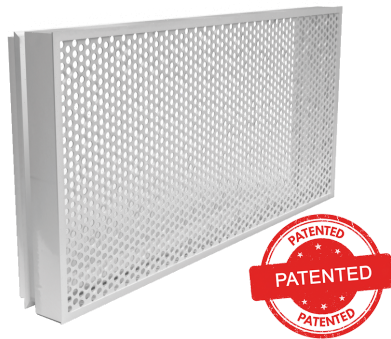

Description

Air supply and exhaust grilles with perforated panel.

Characteristics

Aluminium perimeter frame.

Galvanised steel panel Finish: painted white RAL 9016.

Installation: fastening with brackets.

The perforated mesh is made according to the following specifications:

- 60° alternating round holes;
- empty/full ratio 46%;
- diameter of holes 5mm;
- distance between centres 7mm.

Use

For air exhaust in rooms.

For flush installation for 12.5 mm thick plasterboard walls.

For flush installation for masonry walls.

For extraction and supply on fan coil cabinet.

Accessories

SC - Galvanised steel regulation damper with blades with opposing movement.

On request

Painting in different RAL colours;

Effective Cross-section

H	L					
	400	500	600	800	1000	1200
	Effective Cross-Section (m2)					
75	0,012	0,015	0,018	0,024	0,030	0,036
100	0,016	0,021	0,025	0,033	0,041	0,049
125	0,020	0,025	0,030	0,040	0,050	0,060
150	0,025	0,031	0,037	0,490	0,060	0,074
200	0,033	0,041	0,050	0,067	0,084	0,100
300	0,050	0,064	0,077	0,103	0,129	0,155
400	0,068	0,086	0,104	0,139	0,174	0,206

Operating Data

- V_k: effective speed (m/s).
 - m³/h: flow rate.
 - L: width. H: height.
- All measurements are expressed in mm.

H	V _k m/s	L					
		400	500	600	800	1000	1200
		Flow Rate (m ³ /h)					
75	2	86	108	130	173	216	259
	3	130	162	194	259	324	389
	4	173	216	259	346	432	518
100	2	118	148	177	236	295	354
	3	177	221	266	354	443	531
	4	236	295	354	472	590	708
125	2	144	180	216	288	360	432
	3	216	270	324	432	540	648
	4	288	360	432	576	720	864
150	2	177	221	266	354	443	531
	3	266	332	399	531	664	797
	4	354	443	531	708	886	1063
200	2	238	295	360	482	605	726
	3	356	443	540	724	907	1089
	4	475	590	720	965	1210	1452
300	2	360	461	554	742	929	1115
	3	540	691	832	1112	1393	1672
	4	720	922	1109	1483	1858	2229
400	2	490	619	749	1001	1253	1486
	3	734	929	1123	1501	1879	2229
	4	979	1238	1498	2002	2506	2972

Noise Level dB(A)

dB(A): noise level


	V m/s	dB(A)
Sound Power Level	2	15/20
	3	22/28
	4	38/42

Pressure Drop (Pa)


	V m/s	Pa
Pressure Drop	2	18
	3	40
	4	70

EGFF - Dimensions with and without damper on masonry wall

For installation you need the fixing kit consisting of 4 brackets supplied with the article.
N.B. for installation on a masonry wall, the heights 75 mm, 100 mm are not available.

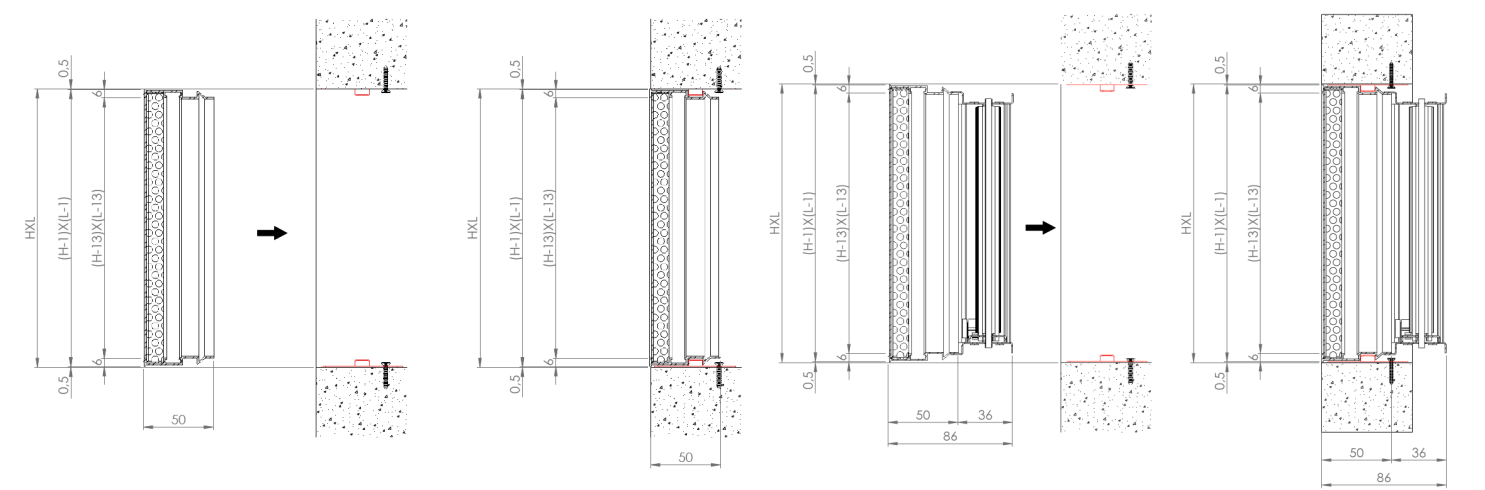


EGFF - Dimensions with and without damper on plasterboard wall

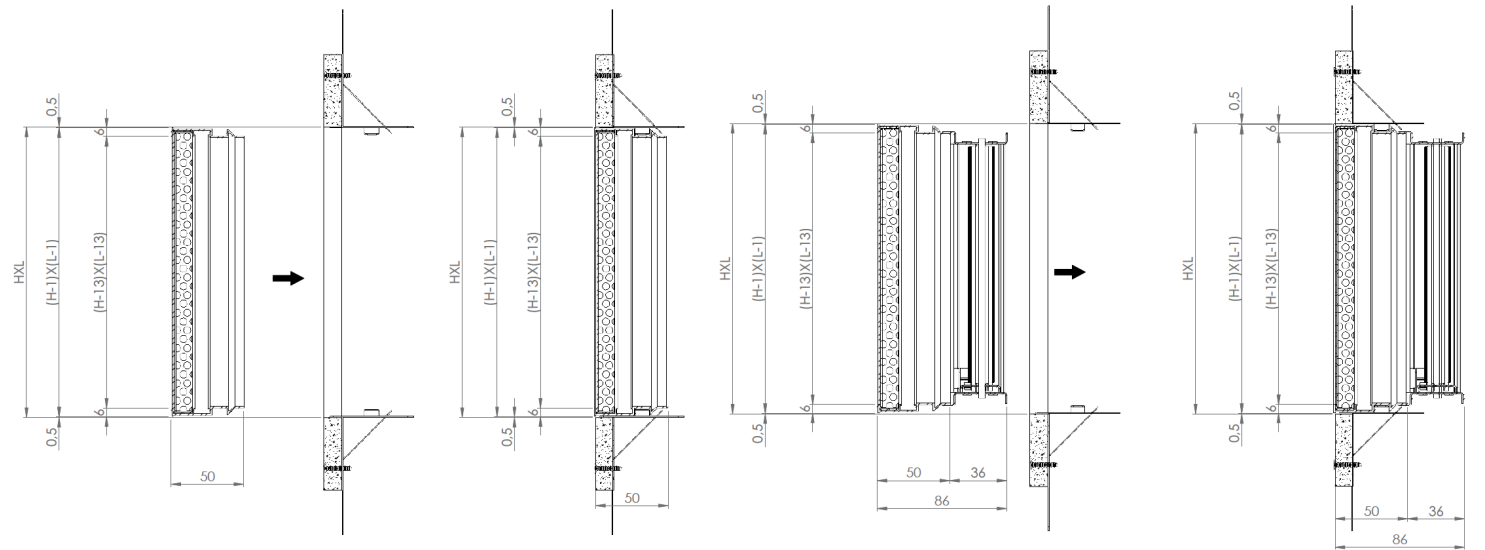

SC - Regulation damper

Galvanised steel regulation damper with blades with opposing movement.

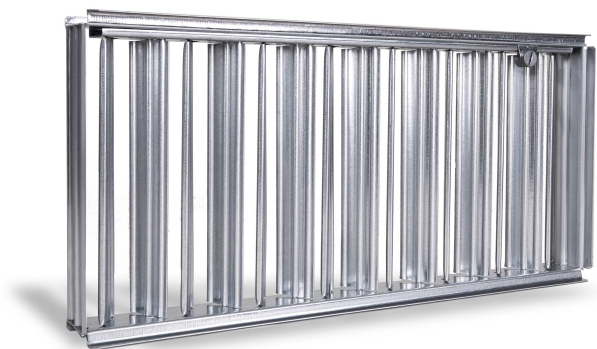

Price List

Dimensions LxH	EGFF	SC - Serranda di taratura
	Eur	Eur
400x75	49,25	18,44
500x75	55,13	22,01
600x75	61,06	25,18
800x75	71,53	31,65
1000x75	81,93	38,83
1200x75	98,32	50,35
400x100	49,25	18,44
500x100	55,13	22,01
600x100	73,26	25,18
800x100	71,53	31,65
1000x100	81,93	38,83
1200x100	98,32	50,35
400x125	52,40	21,28
500x125	55,13	24,64
600x125	61,06	28,08
800x125	71,53	35,96
1000x125	81,93	43,34
1200x125	98,32	56,15
400x150	59,09	21,28
500x150	66,15	24,64
600x150	73,26	28,08
800x150	96,55	35,96
1000x150	98,32	43,34
1200x150	117,99	56,15
400x200	78,80	26,32
500x200	88,20	30,92
600x200	97,70	35,62
800x200	114,47	43,65
1000x200	131,09	48,71

1200x200	157,32	71,24
400x300	92,68	36,84
500x300	104,12	40,56
600x300	115,26	44,34
800x300	135,94	53,79
1000x300	155,74	64,85
1200x300	198,82	88,67
400x400	106,57	42,19
500x400	120,99	50,96
600x400	134,59	54,78
800x400	158,50	67,03
1000x400	182,12	79,54
1200x400	218,55	109,56

Replacement Fixing Kit

For installation you need the fixing kit consisting of 4 brackets.

Description	Eur
Installation kit	30,90