

ETA Aluminium transfer grilles



Description

Aluminium grilles with special light-blocking profile with 20 mm pitch to allow for optimal air circulation from one room to another.

Characteristics

Material: aluminium.

Finish: natural anodised.

Installation: fastening by means of front screws.


Maximum dimensions: 1000 mm x 1000 mm.

Use

Installed on partitions or doors, it allows for optimal air circulation and ensures a balance of pressure in adjacent rooms of air-conditioned buildings with centralised air systems.

Models

- ETA1: grille complete with counter-frame;
- ETA2: grille without counter-frame.

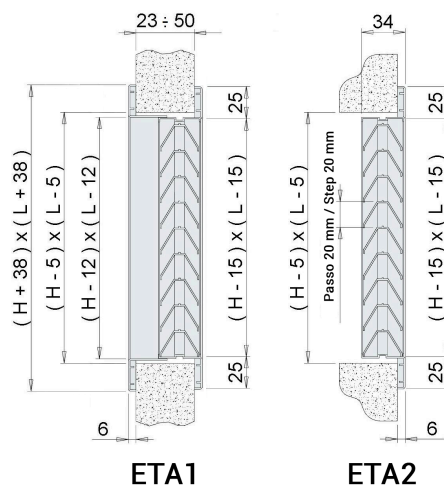


Operating Data

- m³/h: flow rate.
- Pa: pressure drops in Pascal.
- dB(A): noise level.
- L: width. H: height.

All dimensions are expressed in mm.

Dimensions LxH	Effective Section	Flow Rate (m ³ /h)		
		Vk (m/s)		
	m ²	0,8	1	1,5
300x100	0,007	20	25	37
400x100	0,010	29	36	54
500x100	0,012	35	43	65
600x100	0,015	43	54	80
300x160	0,015	43	54	80
400x160	0,020	57	72	108
500x160	0,025	72	90	135
600x160	0,030	86	108	162
300x200	0,019	54	68	103
400x200	0,026	75	93	140
500x200	0,033	95	118	178
600x200	0,040	115	144	216
300x300	0,031	89	112	167
400x300	0,043	123	154	232
500x300	0,054	155	195	292
600x300	0,065	187	234	350
600x400	0,090	260	325	485
600x600	0,139	400	500	750
Pa		7	10	20
dB(A)		25/30	30/35	40/45

Detail of Holes

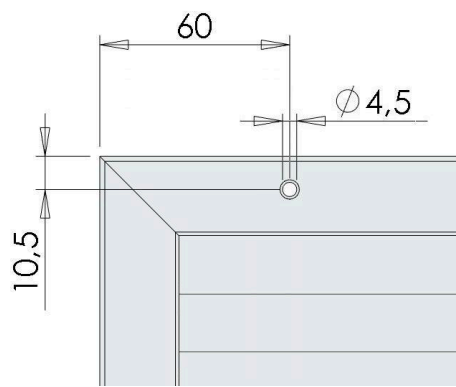

Price List

Note: painted white RAL 9016 + 20%.

Dimensions LxH	ETA1	ETA2	Dimensions LxH	ETA1	ETA2
	Eur	Eur		Eur	Eur
300x100	39,49	27,63	400x200	65,15	46,38
400x100	45,43	31,61	500x200	72,08	50,36
500x100	51,32	35,53	600x200	80,93	57,25
600x100	58,26	40,48	300x300	70,12	50,36
300x160	50,36	35,53	400x300	80,93	57,25
400x160	57,25	40,48	500x300	91,82	65,17
500x160	63,16	44,44	600x300	102,66	73,05
600x160	68,15	47,39	600x400	136,88	97,42
300x200	57,25	40,48	600x600	205,36	146,13