


CR120-1S-M CE-Certified Motorized Cantilever Circular Fire Damper



Description

Circular surface-mounted fire dampers with a fire resistance up to 120 minutes. They ensure minimal pressure drop thanks to the thin blade, the thermal fuse aligned with the blade and the drive located outside the casing. Available in the version for small diameters (from 100 mm). The galvanised steel casing contributes to the damper's light weight. The fire dampers are CE marked with performance declared according to EN 15650:2010 and with fire resistance determined according to EN 1366-2 up to EI 120 (ve i ↔ o)S - (500Pa) and EI 120 (ho i ↔ o)S - (500Pa) depending on the installation surface. The dampers can be equipped with different types of mechanisms, depending on the specific needs of the project.

Characteristics

Galvanised steel structure. 20 mm thick refractory blade. Dimensions: from Ø 100 to Ø 315 Heat-expanding perimeter seal. 2 microswitches (one start and one end switch) already installed. Easy to install. Optimised free surface and minimal pressure drop. Total absence of levers. Optimal acoustic performance. Class C air tightness according to EN1751. Suitable for recessed installation. Suitable for rigid wall, rigid floor and lightweight wall (plasterboard). Does not require maintenance. For indoor use. Operating temperature: max. 50°C.

Use and Classification

- Rigid wall: EI 120 (ve i ↔ o) S - (500 Pa);
- Lightweight wall: EI 120 (ve i ↔ o) S - (300 Pa);
- Slab: EI 120 (ho i ↔ o) S - (500 Pa).

Minimum Distance Principle

This type of fire damper has been optimised to minimise the installation distance between two dampers and between the damper and the adjacent wall. CR120 fire dampers can be installed coupled and adjacent to a wall, ceiling or floor.

Standard Version

- With ONE RFT electronic servomotor drive: code CR120-1S-M + ONE T - 24 / 230 V FDCU.
- With Belimo servomotor drive: code CR120 1S + BFLT 24 / 230 V.


Versions on request

- With electromagnet drive normally energised or normally de-energised , code CR120 1S + UNIQ VD/VM FDCB.

ONE RFT actuator characteristics

The microprocessor-controlled servomotor with spring return, ONE Rf-t, is designed to efficiently operate Rf-t fire dampers of any size. The main characteristics of the ONE Rf-t actuator are the following:

- very low stand-by energy consumption (0.12 W) which allows for up to 5 times less energy consumption compared to conventional servomotors installed in fire dampers;
- the opening status of the fire damper is visible via an indicator located on the actuator; in addition to this, an LED indicates whether the device is powered; the main thermal activation device allows for operational tests to be performed even if there is no mains power supply;
- a further activation device is integrated in the actuator in order to detect a possible fire outside the duct;
- the fuse can be replaced quickly and easily. The fuse housing is located in the servomotor body and it can also be used as an inspection hole for an endoscopic camera;
- the damper can be reset manually using a common 9 Volt alkaline battery. Up to 50 reset cycles can be performed with a single battery;
- IP54 enclosure made of shock-resistant technical polymer;
- there is a pair of microswitches at the start and at the end. Both power and position cables are oversized and clearly identified;
- Power supply 24 VAC/VDC (-10/+20%) or 230 VAC (-15/+15%).

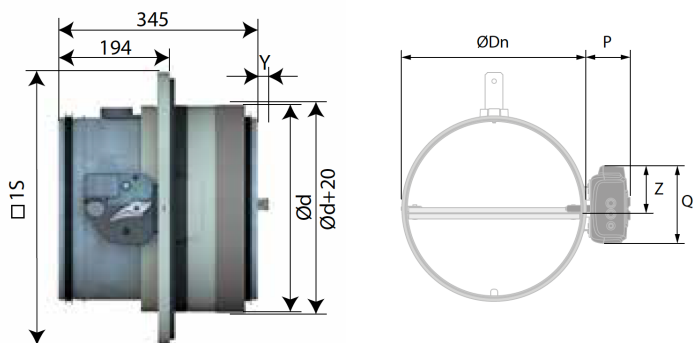

Dimensions

y: blade coming out on wall side.

All dimensions are expressed in mm.

Ø Dn	1s x 1s	Ø d	Ø Hole	Y
100	279	160	180	-
125	299	180	200	-
160	339	220	240	-
200	374	255	275	-
250	419	300	320	-
315	474	355	375	20

	ONE	BFLT
P (mm)	80	63
Q (mm)	136	100
Z (mm)	75	58

Price List

Diameter	ONE T 24V	ONE T 230V	BFLT 24V	BFLT 230V	UNIQ VD/VM
mm	Eur	Eur	Eur	Eur	Eur
100	706,60	755,75	726,88	778,48	635,77
125	722,17	771,31	742,29	793,86	655,09
160	735,22	784,39	755,14	806,75	671,20
200	746,43	784,39	766,26	817,82	685,08
250	767,60	816,75	787,16	838,76	711,27
315	820,04	869,16	838,94	890,54	776,16

Spare Fuses

Description		Eur
	F-ONE - 72°C Thermal Fuse for ONE RFT actuator	72,38
	F-BEL - 72°C Z-BAT Thermal Fuse for Belimo actuators	72,38