


CU-LT-1S-M CE Rectangular Cantilever Fire Damper – Motorized

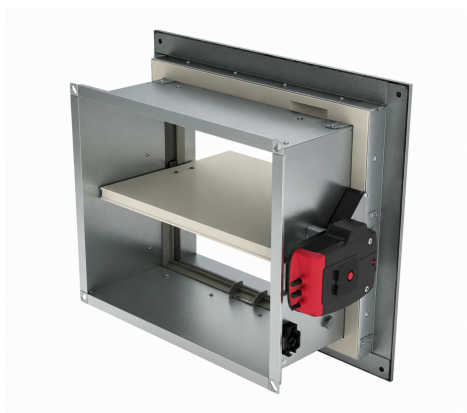

Description

Surface-mounted fire dampers with fire resistance up to 120 minutes, CE marked with performance declared according to EN 15650:2010 and with fire resistance determined according to EN 1366-2 up to EI 120 (ve i ↔ o)S - (500Pa) and EI 120 (ho i ↔ o) S - (500Pa) depending on the installation surface. The dampers can be equipped with different types of mechanisms, depending on the specific needs of the project.

Characteristics

Galvanised steel structure. 25 mm thick refractory blade. Dimensions: from 200x100 to 800x600 Heat-expanding perimeter seal. 2 microswitches (one start and one end switch) already installed. 20 mm connection flange. 300 mm case. Fast, easy surface-mounted installation on rigid wall, rigid floor and lightweight wall (plasterboard). Optimised free surface and minimal pressure drop. Optimal acoustic performance. Class C air tightness according to EN1751. Suitable for recessed installation 0/90/180/270°. Does not require maintenance. For indoor use. Intermediate dimensions on request. Operating temperature: max 50°C.

Use and Classification

- Rigid wall: EI 120 (ve i ↔ o) S - (500 Pa).
- Lightweight wall: EI 120 (ve i ↔ o) S - (500 Pa) (gypsum blocks).
- Lightweight wall: EI 90 (ve i ↔ o) S - (500 Pa) (plasterboard type F).
- Slab: EI 120 (ho i ↔ o) S - (500 Pa) aerated concrete.

Standard Version

- With RFT electronic servomotor drive: code CU-LT-1S + ONE T 24/230 V FDCU.
- With Belimo servomotor drive: code CU-LT-1S + BFLT 24 / 230 V.



ONE RFT actuator characteristics

The microprocessor-controlled servomotor with spring return, ONE Rf-t, is designed to efficiently operate Rf-t fire dampers of any size. The main characteristics of the ONE Rf-t actuator are the following:


- very low stand-by energy consumption (0.12 W) which allows for up to 5 times less energy consumption compared to conventional servomotors installed in fire dampers;
- the opening status of the fire damper is visible via an indicator located on the actuator; in addition to this, an LED indicates whether the device is powered;
- the main thermal activation device allows for operational tests to be performed even if there is no mains power supply;
- a further activation device is integrated in the actuator in order to detect a possible fire outside the duct;
- the fuse can be replaced quickly and easily. The fuse housing is located in the servomotor body and it can also be used as an inspection hole for an endoscopic camera;
- the damper can be reset manually using a common 9 Volt alkaline battery. Up to 50 reset cycles can be performed with a single battery;
- IP54 enclosure made of shock-resistant technical polymer.
- there is a pair of microswitches at the start and at the end. Both power and position cables are oversized and clearly identified.
- power supply 24 VAC/VDC (-10/+20%) or 230 VAC (-15/+15%).

Accessories

- F-ONE - 72°C Thermal Fuse for ONE RFT actuator.
- F-BEL - 72°C Z-BAT Thermal Fuse for Belimo actuators.

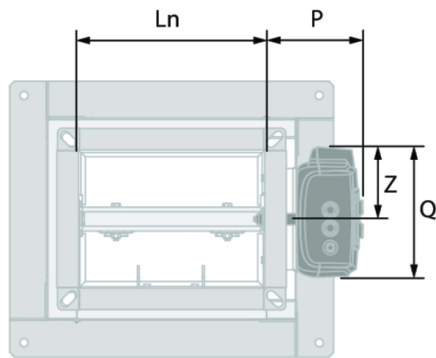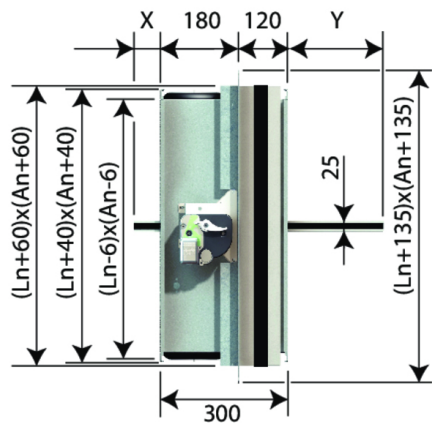

An < 400mm

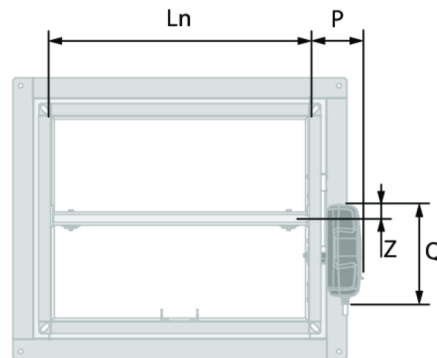

An ≥ 400mm

Dimensions

x: blade coming out on servomotor side

y: blade coming out on wall side

An(mm)	150	200	250	300	350	400	450	500	550	600
x (mm)								17	42	67
y (mm)	2	27	52	77	102	127	152	177	202	227

	An < 400mm (mm)		An ≥ 400mm (mm)	
	ONE	BFLT	ONE	BFLT
P (mm)	97	81	97	81
Q (mm)	136	80	191	80
Z (mm)	75	40	27	40

Version with Motorised Control ONE RFT 24V - Price List

Ln: base (mm)													
An: altezza	200	250	300	350	400	450	500	550	600	650	700	750	800
mm	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	612,65	619,35	626,07	632,81	639,46	646,21	652,86	659,62	666,34	673,03	679,69	686,45	693,14
150	614,21	620,91	627,57	634,35	641,02	646,21	654,46	661,15	667,87	674,60	681,23	688,02	694,71
200	615,73	622,47	629,15	635,94	642,60	649,29	655,99	662,74	669,40	676,14	682,82	689,57	696,27
250	622,99	630,18	637,30	644,56	651,65	658,88	666,04	673,25	680,48	687,63	694,81	701,98	727,14
300	630,18	637,87	645,47	653,14	660,81	668,50	676,14	683,78	691,42	699,04	724,65	732,31	739,99
350	637,37	645,55	653,69	661,77	669,93	678,06	686,19	694,34	720,38	728,52	736,57	744,75	752,88
400	644,62	653,19	661,80	670,46	679,02	687,63	714,17	722,79	731,37	739,99	748,62	757,17	765,78
450	651,83	660,94	669,98	679,09	688,08	715,19	724,28	733,30	742,37	751,45	760,54	769,66	778,66
500	659,07	668,60	678,18	687,71	715,23	724,72	734,33	743,83	753,39	762,94	772,47	782,06	809,50
550	666,24	676,33	686,33	696,33	724,34	734,33	744,32	754,42	764,38	774,39	784,45	812,43	822,44
600	673,47	684,02	694,47	722,96	733,41	743,92	754,42	764,88	775,43	785,95	814,36	824,79	835,33

Version with Motorised Control ONE RFT 230V - Price List

Ln: base (mm)													
An: altezza	200	250	300	350	400	450	500	550	600	650	700	750	800
mm	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	658,22	664,85	671,61	678,36	685,00	691,76	698,44	705,16	711,87	718,58	725,24	732,01	738,72
150	659,76	666,46	673,09	679,93	686,56	693,27	699,97	706,70	713,42	720,12	726,78	733,54	740,23
200	661,28	668,03	674,67	681,48	688,15	694,81	701,56	708,29	714,93	721,66	728,34	735,10	741,79
250	668,56	675,70	682,86	690,08	697,21	704,43	711,57	718,74	726,01	733,20	740,37	747,52	772,64
300	675,70	683,39	691,02	698,70	706,34	714,00	721,66	729,31	737,00	744,62	770,23	777,89	785,51
350	682,93	691,08	699,28	707,32	715,45	723,56	731,74	739,88	765,90	774,07	782,15	790,28	798,42
400	690,12	698,74	707,40	715,97	724,54	733,20	759,74	768,36	776,89	785,51	794,18	802,71	811,36
450	697,40	706,47	715,55	724,62	733,62	760,74	769,81	778,89	787,98	796,95	806,09	815,19	824,24
500	704,61	714,12	723,73	733,24	760,78	770,31	779,86	789,35	798,91	808,48	817,99	827,61	855,05
550	711,79	721,85	731,90	741,89	769,86	779,86	789,88	799,95	809,93	819,93	830,01	857,96	867,93
600	719,02	729,51	740,02	768,51	779,00	789,45	799,95	810,43	820,96	831,48	859,91	870,34	880,83

Version with Motorised Control Belimo BFLT 24 V - Price List

Ln: base (mm)													
An: altezza	200	250	300	350	400	450	500	550	600	650	700	750	800
mm	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	666,95	673,92	680,92	687,93	694,89	701,94	708,88	715,94	722,91	729,87	736,82	743,88	750,87
150	668,54	675,52	682,48	689,57	696,50	703,53	710,50	717,48	724,53	731,49	738,43	745,52	752,44
200	670,19	677,15	684,12	691,19	698,13	705,09	712,13	719,15	726,07	733,12	740,06	747,12	754,10
250	677,75	685,20	692,63	700,18	707,60	715,12	722,58	730,09	737,62	745,10	752,61	760,06	786,26
300	685,20	693,21	701,13	709,16	717,13	725,14	733,12	741,06	749,07	757,06	783,69	791,68	799,69
350	692,75	701,22	709,78	718,12	726,61	735,08	743,60	752,07	779,23	787,71	796,14	804,61	813,16
400	700,23	709,22	718,15	727,19	736,12	745,10	772,78	781,74	790,67	799,69	808,64	817,59	826,57
450	707,81	717,26	726,67	736,18	745,59	773,79	783,31	792,71	802,21	811,60	821,08	830,61	839,99
500	715,32	725,23	735,25	745,16	773,83	783,80	793,78	803,66	813,62	823,61	833,52	843,51	872,13
550	722,81	733,30	743,75	754,17	783,36	793,78	804,21	814,72	825,07	835,54	846,01	875,17	885,62
600	730,34	741,28	752,24	781,94	792,83	803,77	814,72	825,60	836,63	847,57	877,16	888,12	899,04

Version with Motorised Control Belimo BFLT 230 V - Price List

Ln: base (mm)													
An: altezza	200	250	300	350	400	450	500	550	600	650	700	750	800
mm	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur	Eur
100	717,37	724,32	731,35	738,37	745,28	752,34	759,30	766,31	773,31	780,31	787,24	794,31	801,27
150	719,00	725,97	732,90	739,99	746,94	753,96	760,93	767,96	774,92	781,90	788,86	795,91	802,92
200	720,55	727,62	734,53	741,61	748,58	755,52	762,53	769,57	776,51	783,52	790,51	797,53	804,48
250	728,17	735,65	743,05	750,62	758,04	765,54	772,99	780,49	788,07	795,50	803,04	810,47	836,68
300	735,65	743,64	751,56	759,53	767,55	775,54	783,52	791,49	799,49	807,45	834,10	842,09	850,10
350	743,12	751,63	760,16	768,56	777,06	785,52	794,03	802,50	829,64	838,15	846,53	855,05	863,57
400	750,66	759,62	768,62	777,61	786,51	795,50	823,23	832,19	841,11	850,10	859,09	868,00	876,99
450	758,20	767,66	777,15	786,60	796,02	824,22	833,72	843,17	852,60	862,02	871,55	881,00	890,45
500	765,72	775,66	785,68	795,58	824,31	834,22	844,20	854,08	864,06	874,04	883,94	893,95	922,54
550	773,24	783,75	794,18	804,56	833,78	844,20	854,22	865,13	875,52	885,98	896,47	925,62	936,03
600	780,76	791,71	802,62	832,35	843,26	854,20	865,13	876,04	887,03	897,99	927,64	938,54	949,48

Spare Fuses

Description		Eur
	F-ONE - 72°C Thermal Fuse for ONE RFT actuator	72,38
	F-BEL - 72°C Z-BAT Thermal Fuse for Belimo actuators	72,38