

VU120 Smoke Dampers with Multiple Compartment



Description

Smoke dampers with single blade made according to the European Standard EN 12101-8 and tested according to the EN 1366-10 Standard. VU 120 has a fire resistance up to 120 minutes. EI 120 (ved i ↔ o) S 1500 AA Multi, EI 120 (hod i ↔ o) S 1500 AA Multi.

Characteristics

Pressure tested up to 1500 Pa 30 mm thick refractory blade. Heat-expanding perimeter seal. Standard connection on both sides with 30 mm flanges. 350 mm case. Intermediate dimensions on request. Optimised free surface and minimal pressure drop. Does not require maintenance. For indoor use. Operating temperature: max 50°C. 2 microswitches (one start and one end switch) already installed.

Use



It is normally called a smoke control damper and it is an integral part of the smoke and heat evacuation system. It is used in ventilation systems to prevent the propagation of smoke through the ventilation system and/or to convey smoke produced by a fire outside the building. In fact, in the event of a fire, it must ensure the proper evacuation of smoke so that the escape routes are clear and personnel can evacuate the building. In the event of an emergency, the smoke damper can open to let the smoke out or close to prevent the propagation of smoke through the ventilation system.

Standard Version


- With Belimo servomotor drive with spring return: code VU120 + NF/SF 24V.
- With Belimo servomotor drive without spring return: code VU120 + BEN 24V.

Versions on Request

- With electromagnet drive normally energised: code VU120 + MANF 24/48V VM FDCU.
- With electromagnet drive normally de-energised: code VU120 + MANF 24/48V VD FDCU.

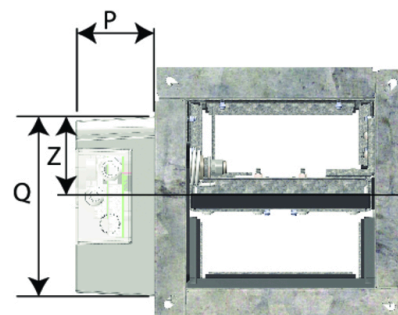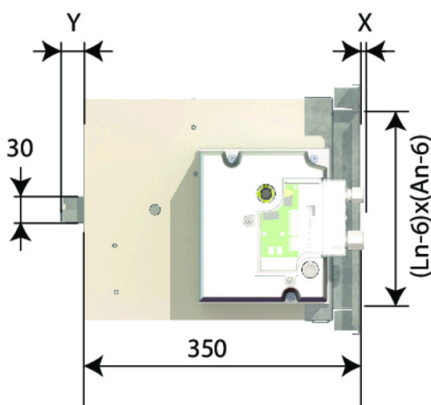

An < 300mm

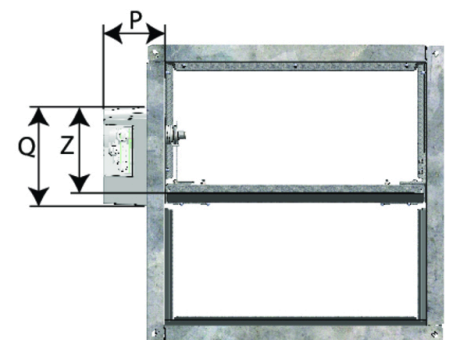

An ≥ 300mm

y: blade coming out on wall side.

	base (mm)									
Height	750	800	850	900	950	1000	1050	1100	1150	1200
mm	€	€	€	€	€	€	€	€	€	€
200	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-
350	-	-	-	-	-	-	-	-	-	-
400	-	-	-	-	-	-	-	-	-	-
450	-	-	-	-	-	-	-	-	-	-
500	-	-	-	-	-	-	-	-	-	-
550	-	-	-	-	-	-	-	-	-	-
600	-	-	-	-	-	-	-	-	-	-
650	-	-	-	-	-	-	-	-	-	-
700	-	-	-	-	-	-	-			
750	-	-	-	-	-					

Price List VU120 + BEN 24V

a.r. : price on request

[illegible]

	base (mm)									
Height	750	800	850	900	950	1000	1050	1100	1150	1200
mm	€	€	€	€	€	€	€	€	€	€
200	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-
350	-	-	-	-	-	-	-	-	-	-
400	-	-	-	-	-	-	-	-	-	-
450	-	-	-	-	-	-	-	-	-	-
500	-	-	-	-	-	-	-	-	-	-
550	-	-	-	-	-	-	-	-	-	-
600	-	-	-	-	-	-	-	-	-	-
650	-	-	-	-	-	-	-	-	-	-
700	-	-	-	-	-	-	-	-	-	-
750	-	-	-	-	-	-	-	-	-	-
800	-	-	-	-	-	-	-	-	-	-
850	-	-	-	-	-	-	-	-	-	
900	-	-	-	-	-	-	-	-		
950	-	-	-	-	-	-	-			
1000	-	-	-	-	-	-				