

EVPMC Supply and exhaust ABS air valves



Description

ABS supply and exhaust air valves painted white RAL 9010, with adjustable central cone.

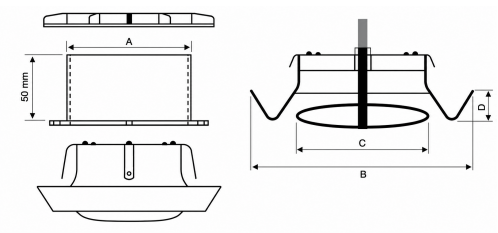
Use

Ceiling installation, directly on the duct, for air supply or exhaust in service rooms, bathrooms and shops.

Characteristics

Material: ABS.
Finish: white RAL 9010.
Installation: by means of non-visible screws.

Dimensions

Technical Drawing	Models	A (mm)	B (mm)	C (mm)	D (mm)
	EVPMC 100	99	149	89	20
	EVPMC 125	124	165	109	20
	EVPMC 150	148	185	130	20
	EVPMC 160	158	195	130	20
	EVPMC 200	199	230	177	20

Operating Data

- V_k : effective speed (m/s).
- m^3/h : flow rate.
- Pa: pressure drops in Pascal.
- L(m): air throw in metres calculated on ceiling installation, terminal velocity 0.25 m/s.
- dB(A): noise level.

Models	m^3/h	Apertura "S" (mm)	Pressure Drop (Pa)	dB(A)
EVPMC 100	54	15	25	25
	72	18	40	30
	108	20	80	38
EVPMC 125	72	9	58	38
	108	17	68	35
	144	23	70	35
EVPMC 150 / 160	108	10	70	40
	144	18	68	35
	180	25	70	33
EVPMC 200	108	17	60	38
	144	22	68	35
	180	25	72	35

Price List

Models	Eur
100	5,84
125	6,80
150	8,84
160	10,37
200	13,70