


EA16 Accessories for VMC : rigid duct



Description

Insulated and sound-absorbing ducts are designed to ensure high thermal insulation performance and noise reduction, while also providing low pressure losses thanks to their particularly smooth inner surface. Made from lightweight yet durable materials, they are easy to cut, elastic and flexible, while maintaining high impact resistance without deforming or denting over time.

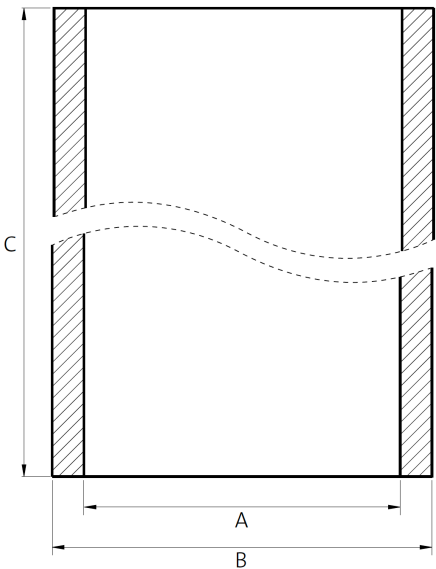

Dimensions

Diameter	A (mm)	B (mm)	C (mm)	Weight per Meter (kg)
125	125	157	2000	0,48
160	160	192	2000	0,53
180	180	212	2000	0,67
200	200	232	2000	0,80

Pressure Drops

Diameter	Airflow (m³/h)					
	100	200	300	400	500	600
	Pressure Drop (Pa)					
125	1,0	2,7	6,1	10,8	16,9	24,3
160	1,0	1,0	1,8	3,1	4,9	7,0
180	1,0	1,0	1,0	1,6	2,5	3,6
200	0,1	0,2	0,5	0,9	1,3	1,9

Price List

Price for 2 m unit.

Internal Ø	External Ø	Eur
mm	mm	
125	157	86,94
160	192	109,67
180	212	144,50
200	232	170,22