

EVSLC Ductable fan coil



Description

EVSLC is a recessed fan coil unit which, in combination with a heat pump, allows for the optimal heating and cooling of both residential environments and those of the service sector.

Characteristics

EVSLC has a compact size, thanks to which it can be easily installed concealed in ceilings and walls. The structure consists of a self-supporting frame made of galvanised sheet metal with internal thermal and acoustic insulation, a water coil adequately sized for satisfactory heat exchange, and a low pressure drop and easily removable filtering section. Each unit is also equipped with an EC centrifugal fan with low energy consumption, with forward blades for reduced noise. In addition to this, the motors are of the constant flow type, and this allows for self-adaptation to the plant made. Four sizes are available with different heating and cooling capacities to allow for the most suitable one to be chosen according to plant requirements.

Control electronics

On-board electrical panel with microprocessor and dedicated control. The unit is sold with a remote panel that allows the user to control speed, temperature and operating modes. It is possible to choose between simple remote control and control with a Wi-Fi module which allows the operation of the fan coil unit to be managed locally and remotely using an App.

The displays available for this unit are:

- EVCNV2-N advanced remote control with built-in sensors, black.
- EVCNV2-B advanced remote control with built-in sensors, white.
- EVCNW2-N advanced remote control with built-in sensors and Wi-Fi, black.
- EVCNW2-B advanced remote control with built-in sensors and Wi-Fi, white.

Technical Specifications

- (1) Coil water temperature 7/12°C, room air temperature 27°C d.b. and 19°C w.b. (EU Regulation 2016/2281).
- (2) Coil water temperature 45/40°C, room air temperature 20°C (EU Regulation 2016/2281).
- (3) Data referring to the UNI EN 3741 and UNI EN 3744 Standards.






EVSLC		40	60	80	100	120
Nominal Airflow at Maximum Speed	m³/h	390	560	730	905	1150
Portata Aria Nominale Med Velocità	m³/h	260	350	440	550	750
Portata Aria Nominale Min Velocità	m³/h	120	180	240	260	280
Available Pressure	Pa	90	130	110	140	140
Rated Power Consumption of Recirculation Fan	kW	0,085	0,15	0,17	0,17	0,24
Heating / Cooling Performance		40	60	80	100	120
Total Cooling Capacity ¹	kW	1,9	3,0	3,5	4,4	5,9
Sensible Cooling Capacity ¹	kW	1,4	2,2	2,8	3,6	4,2
Water Flow Rate	m³/h	0,33	0,52	0,60	0,76	1,0
Pressure Drop	kPa	3,9	11	21	14	16
Total Cooling Capacity ²	kW	2,3	3,2	3,9	5,3	6,2
Water Flow Rate	m³/h	0,39	0,55	0,67	0,91	1,1
Pressure Drop	kPa	7,5	11	21	16	19
Acoustic Data ³		40	60	80	100	120
Sound Power Lw Transmitted Through the Structure	dB(A)	55	59	60	62	63
Sound Power Lw Radiated into the Duct	dB(A)	59	64	68	69	71
Average Sound Pressure Level Lp at 1 m	dB(A)	43	46	48	49	50
Average Sound Pressure Level Lp at 3 m	dB(A)	37	38	40	41	42
Electrical data		40	60	80	100	120
Power Supply	V / ph / Hz	230 / 1 / 50				
Maximum Power Consumption	kW	0,09	0,19	0,19	0,28	0,28

Maximum Current Draw	A	0,7	1,3	1,3	1,9	1,9
----------------------	---	-----	-----	-----	-----	-----

Dimensions

All dimensions are expressed in mm.

Models	A	B	C	D	E	F	G	Weight kg	Air Supply		Return Air	
									H	I	J	K
EVSLC 40	590	550	240	695	570	637	90	32	460	150	430	160
EVSLC 60	790	750	240	695	770	637	90	42	660	150	630	160
EVSLC 80	990	950	240	695	970	637	90	46	860	150	830	160
EVSLC 100	1190	1150	240	695	1170	637	90	54	1060	150	1030	160
EVSLC 120	1480	1440	240	695	1460	637	90	65	1320	150	1320	160

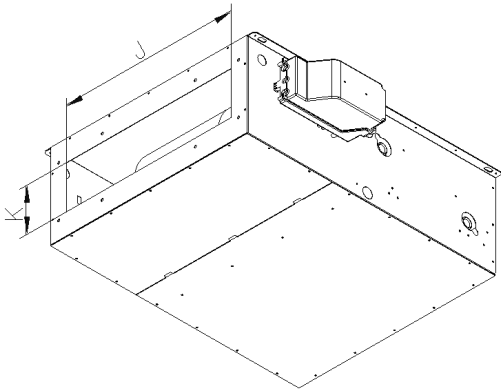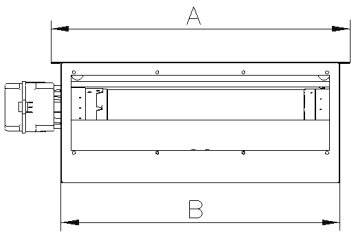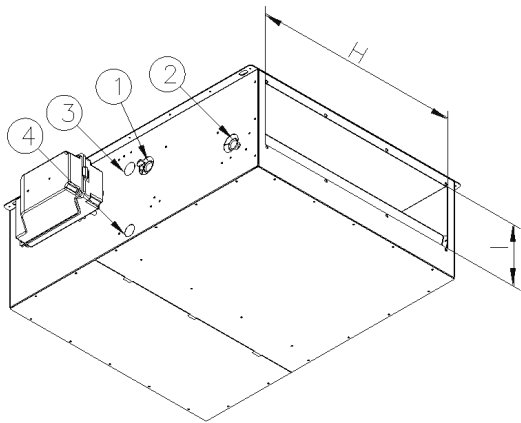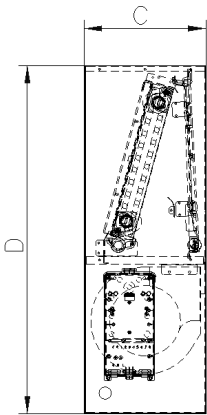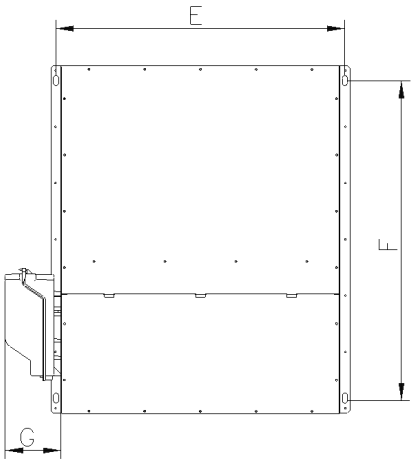


Standard configuration, water coil connections on the LEFT with respect to the air flow.
On request, water coil connections on the RIGHT with respect to the air flow.

Models	Water Coil Connection Size		Condensate Drain Size	
	1 - Input	2 - Out	3 - Horizontal Version (mm)	4 - Vertical Version (mm)
EVSLC 40	3/4" F	3/4" F	18	20
EVSLC 60	3/4" F	3/4" F	18	20
EVSLC 80	3/4" F	3/4" F	18	20
EVSLC 100	3/4" F	3/4" F	18	20
EVSLC 120	3/4" F	3/4" F	18	20

Horizontal
and Vertical
Installation

A: air supply.
B: air exhaust.\

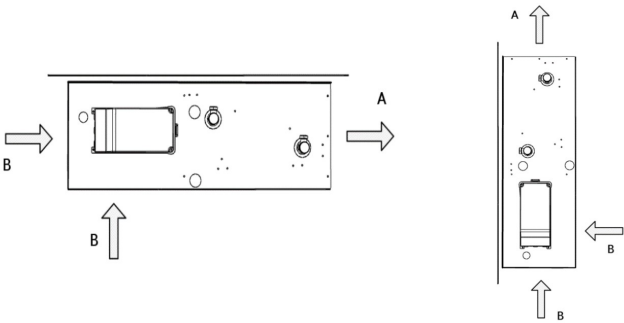

Exhaust Air Configuration

In EVSLC units, it is possible to change the air exhaust outlet from rear to lateral.

