

MF Female coupling connectors



Description

The MF female coupling is a connection component designed to join male duct components within air distribution systems, ensuring a precise, secure, and durable connection.

Thanks to its geometry and manufacturing accuracy, the MF coupling provides continuity throughout the ductwork, facilitating the installation of ducts, fittings, and accessories in ventilation, air conditioning, and air handling systems.


Features

Material thickness:

- $\varnothing 80 - 300 \text{ mm}$: $s = 0.6 \text{ mm}$;
- $\varnothing 315 \text{ mm}$: $s = 0.7 \text{ mm}$.

Spigot length (l2):

- $\varnothing 80 - 250 \text{ mm}$: $l2 = 40 \text{ mm } \varnothing$;
- $280 - 315 \text{ mm}$: $l2 = 60 \text{ mm}$.

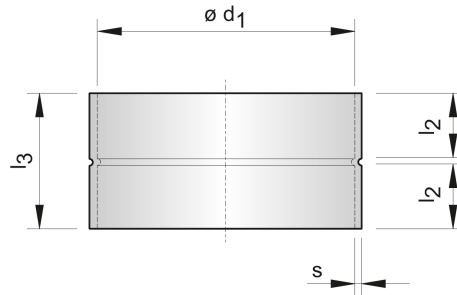


Dimensions and Price List

Dimensions are expressed in mm.
Dimensions from Ø 80 mm to Ø 315 mm.

Ø d ₁	l ₂	l ₃	s	€
mm	mm	mm	mm	
80	40	90	0,6	3,58
100	40	90	0,6	3,81
125	40	90	0,6	3,97
140	40	90	0,6	a.r.
150	40	90	0,6	4,38
160	40	90	0,6	4,49
180	40	90	0,6	4,73
200	40	90	0,6	4,96
250	40	90	0,6	7,50
280	60	130	0,6	a.r.
300	60	130	0,6	11,01
315	60	130	0,7	11,36

Dimensions and Price List

Dimensions are expressed in mm.
Dimensions from Ø 355 mm to Ø 500 mm.



Ø d ₁	l	kg	€
mm	mm		
355	130	0,62	15,55
400	180	0,96	22,38
450	170	1,17	26,85
500	180	1,46	30,98