

MS Saddles



Description

The MS saddle connector is a fitting designed to create quick and secure branch connections on existing circular ducts, allowing a secondary branch to be connected to the main ductwork.

Its special saddle-shaped design ensures a perfect fit to the surface of the duct, providing mechanical stability and maintaining smooth airflow throughout the system.

The MS saddle connector is a practical and efficient solution for creating new branch connections or modifying air distribution networks, helping to reduce installation time and costs.

Features

Compatible with spiral ducts and standard circular duct systems.

Sheet thickness :

- diameters 80-250 mm $t = 0,7$ mm.

Spigot length :

- diameter 80 mm = 25 mm;
- diameters 100-250 mm = 40 mm.

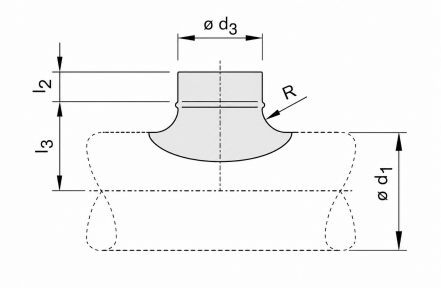
Models

- MS – Pressed galvanized sheet metal saddle.

On request

- MSG – Pressed galvanized sheet metal saddle with gasket.

Dimensions and Price List

Technical Drawing	Tubo Ø d1 (mm)	Ø d3 (mm)	L3 (mm)	L2 (mm)	R (mm)	MS
						€
	100	80	60	40	10	6,12
	150	80	85	40	10	6,12
	125	100	75	40	15	7,44
	150	100	90	40	15	7,44
	150	125	90	40	15	8,64
	200	125	115	40	15	8,64
	200	150	120	40	20	11,36
	200	160	120	40	20	11,70
	250	150	145	40	20	11,36
	250	200	150	40	25	14,87