

## EFPLZ-S pannelli filtranti minipieghe



### Descrizione

Pleated filter panel in polypropylene fibre with progressive density.

### Caratteristiche


Galvanised steel frame.  
Polypropylene filter media.  
Low pressure drop.  
High efficiency with reduced thickness.  
Recommended final pressure drop 300 Pa.

### Impiego

Pre-filtration on absolute filters.  
Air treatment units.  
Filtration and ventilation systems.

### A richiesta

Filters with non-standard dimensions.

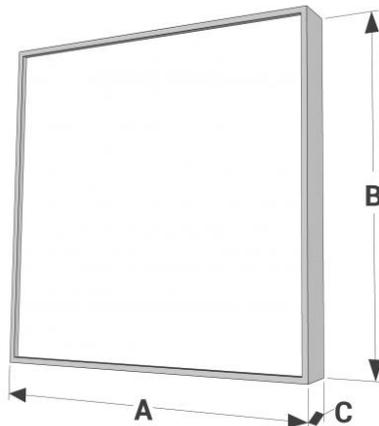

### Dimensioni e listino prezzi:

| model |        |       | flow rate       | filtering surface area | Initial pressure drop |     |     | EFPLZ-S   | EFPLZ-S    | EFPLZ-S  |
|-------|--------|-------|-----------------|------------------------|-----------------------|-----|-----|-----------|------------|----------|
| Width | Height | Depth |                 |                        | M5                    | F7  | F9  | M5        | F7         | F9       |
| mm    | mm     | mm    | $\frac{m^3}{h}$ | $m^2$                  | Pa                    | Pa  | Pa  | ePM10 55% | ePM2,5 65% | ePM1 80% |
| A     | B      | C     |                 |                        |                       |     |     | euro      | euro       | euro     |
| 287   | 592    | 48    | 1530            | 3,3                    | 50                    | 125 | 190 | 90,09 ∨   | 94,20 ∨    | 103,67 ∨ |
| 592   | 592    | 48    | 3100            | 6,6                    | 50                    | 125 | 190 | 171,84 ∨  | 179,89 ∨   | 199,07 ∨ |
| 287   | 592    | 98    | 1700            | 3,6                    | 70                    | 145 | 210 | a.r. ∨    | a.r. ∨     | a.r. ∨   |
| 592   | 592    | 98    | 3400            | 7,3                    | 70                    | 145 | 210 | a.r. ∨    | a.r. ∨     | a.r. ∨   |