

EFFP Multi-V absolute filters for high flow rates



Description

Multi-V absolute filter for high flows rates and turbulent flows.

Characteristics

Material : anodized aluminium frame
Simple glass microfiber filter media, waterproof, welded wire separators and polyurethane seal.

Use


Air systems in pharmaceutical, food and electronics industries, hospitals or wherever the control of the contamination of the atmosphere is required.

On demand

- Stainless steel frame AISI 304.

Energy saving

Multi-V filters are manufactured with high surface. Although the final pressure drop can be considered 600-650 Pa, to ensure significant energy savings we recommend replacing the elements when reaching 400-450 Pa.

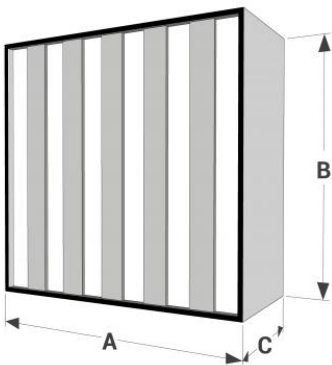

Operating data

Pa : pressure drop in Pascal

	H13	H14
initialing pressure drop	250 Pa	290 Pa
final pressure drop max	650 Pa	650 Pa
max temperature	80° C	80° C
max umidity	100%	100%
filtration efficiency class (EN 1822-1)	H 13	H 14

Dimensions and price list

Dimensions are expressed in mm

model A x B x C	efficiency	filtering surface m ²	air flow capacity m ³ /h	absolute filter EFFP
				euro
305x305x292	H13	10,0	1000	✓
305x610x292	H13	19,0	2000	✓
610x610x292	H13	40,0	4000	✓
305x305x292	H14	10,0	800	✓
305x610x292	H14	19,0	1600	✓
610x610x292	H14	40,0	3200	✓