

EFSP Thermowelded synthetic fibre bag filter



Description :


Thermowelded synthetic fibre bag filter.

Characteristics :

Material : galvanized steel frame
Synthetic fiber.
Maximum pressure drop 450Pa (Pascal).
Maximum temperature of use 70 ° C.
Maximum relative humidity 100%.

Use :

- air treatment units
- pre-filtration for high efficiency filters
- filtration in paint booths.

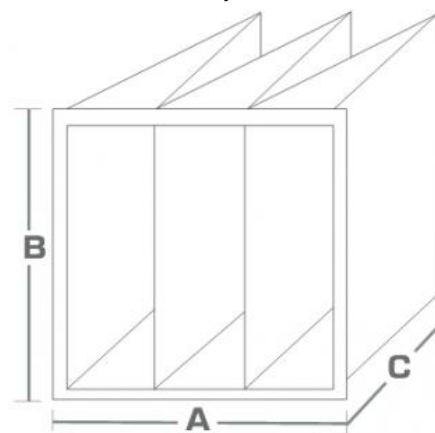

Dimensions and price list:

Dimensions are expressed in mm

Item normally available from stock

M5 - Pocket depth 360mm, 500mm e 600mm

modello	Classe		n° tasche	portata nominale	superficie filtrante	Perdita di carico iniziale	Euro
A x B x C mm	EN779:2012	ISO EN16890		m ³ /h	m ²	Pa	
287x592x360	M5	ePM10=65%	3	1700	1,3	55	▼
490x592x360	M5	ePM10=65%	5	2800	2,15	55	▼
592x592x360	M5	ePM10=65%	6	3400	2,6	55	▼
287x592x500	M5	ePM10=65%	3	1700	1,8	50	▼
490x592x500	M5	ePM10=65%	5	2800	3	50	▼
592x592x500	M5	ePM10=65%	6	3400	3,6	50	▼
287x592x600	M5	ePM10=65%	3	1700	2,15	40	▼
490x592x600	M5	ePM10=65%	5	2800	3,6	40	▼
592x592x600	M5	ePM10=65%	6	3400	4,25	40	▼

F7 - Pocket depth 535mm

modello	Classe		n° tasche	portata nominale	superficie filtrante	Perdita di carico iniziale	Euro
A x B x C mm	EN779:2012	ISO EN16890		m ³ /h	m ²	Pa	
287x592x535	F7	ePM2,5 70%	3	1700	1,85	115	▼
490x592x535	F7	ePM2,5 70%	5	2800	3,05	115	▼
592x592x535	F7	ePM2,5 70%	6	3400	3,65	115	▼
287x592x535	F7	ePM2,5 70%	4	1700	2,45	100	▼
490x592x535	F7	ePM2,5 70%	6	2800	3,65	100	▼
592x592x535	F7	ePM2,5 70%	8	3400	4,85	100	▼
287x592x535	F7	ePM2,5 70%	5	1700	3,05	80	▼
490x592x535	F7	ePM2,5 70%	8	2800	4,85	80	▼
592x592x535	F7	ePM2,5 70%	10	3400	6,05	80	▼

F8 - Pocket depth 535mm

modello	Classe		n° tasche	portata nominale	superficie filtrante	Perdita di carico iniziale	Euro
A x B x C mm	EN779:2012	ISO EN16890		m ³ /h	m ²	Pa	
287x592x535	F8	ePM1 65%	3	1700	1,85	145	▼
490x592x535	F8	ePM1 65%	5	2800	3,05	145	▼
592x592x535	F8	ePM1 65%	6	3400	3,65	145	▼
287x592x535	F8	ePM1 65%	4	1700	2,45	120	▼
490x592x535	F8	ePM1 65%	6	2800	3,65	120	▼
592x592x535	F8	ePM1 65%	8	3400	4,85	120	▼
287x592x535	F8	ePM1 65%	5	1700	3,05	105	▼
490x592x535	F8	ePM1 65%	8	2800	4,85	105	▼
592x592x535	F8	ePM1 65%	10	3400	6,05	105	▼

F7 - Pocket depth 635mm

Dimensions are expressed in mm

Item normally available from stock

modello	Classe		n° tasche	portata nominale	superficie filtrante	Perdita di carico iniziale	Euro
A x B x C mm	EN779:2012	ISO EN16890		m ³ /h	m ²	Pa	
287x592x635	F7	ePM2,5 70%	3	1700	2,2	105	▼
490x592x635	F7	ePM2,5 70%	5	2800	3,65	105	▼
592x592x635	F7	ePM2,5 70%	6	3400	4,35	105	▼
287x592x635	F7	ePM2,5 70%	4	1700	2,95	85	▼
490x592x635	F7	ePM2,5 70%	6	2800	4,35	85	▼
592x592x635	F7	ePM2,5 70%	8	3400	5,85	85	▼
287x592x635	F7	ePM2,5 70%	5	1700	3,65	65	▼
490x592x635	F7	ePM2,5 70%	8	2800	5,85	65	▼
592x592x635	F7	ePM2,5 70%	10	3400	7,30	65	▼

F8 - Pocket depth 635mm

modello	Classe		n° tasche	portata nominale	superficie filtrante	Perdita di carico iniziale	Euro
A x B x C mm	EN779:2012	ISO EN16890		m ³ /h	m ²	Pa	
287x592x635	F8	ePM1 65%	3	1700	2,2	135	▼
490x592x635	F8	ePM1 65%	5	2800	3,65	135	▼
592x592x635	F8	ePM1 65%	6	3400	4,35	135	▼
287x592x635	F8	ePM1 65%	4	1700	2,95	115	▼
490x592x635	F8	ePM1 65%	6	2800	4,35	115	▼
592x592x635	F8	ePM1 65%	8	3400	5,85	115	▼
287x592x635	F8	ePM1 65%	5	1700	3,65	95	▼
490x592x635	F8	ePM1 65%	8	2800	5,85	95	▼
592x592x635	F8	ePM1 65%	10	3400	7,30	95	▼

Dimensions are expressed in mm

Item normally available
from stock