



# ETS

Galvanized metal sheet duct

## Technical data sheet


Rev.00




Diameter mm	Perimeter	t	Unit weight	Maximum vacuum allowable
	m <sup>2</sup>	mm	m <sup>2</sup> /h	Pa
80	0,251	0,5	1,19	27000
100	0,314	0,5	1,38	21000
125	0,393	0,5	1,94	15000
150	0,471	0,5	2,21	8300
160	0,503	0,5	2,49	8300
200	0,628	0,5	3,10	5000
250	0,785	0,5	4,31	2300
300	0,942	0,6	5,18	2000
315	0,990	0,6	5,44	2000
355	1,115	0,6	6,13	2000
400	1,257	0,6	9,21	4500
450*	1,414	0,6	10,36	3000
500*	1,571	0,6	11,51	3000
560*	1,759	0,6	12,90	3000
630*	1,979	0,7	14,52	3900
710*	2,231	0,8	16,36	1500
800*	2,513	0,8	18,44	1500
900*	2,827	0,8	25,93	1500
1000*	3,142	0,8	28,81	1500
1120*	3,519	0,8	32,25	1500
1200*	3,768	0,9	34,10	1000
1250*	3,927	0,9	36,00	800

\* Con venatura di rinforzo


## ETS WITHOUT REINFORCING RIBS

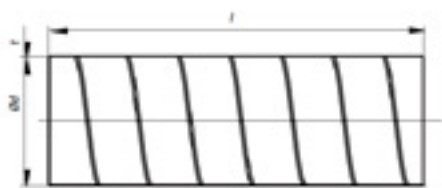


## ETS WITH REINFORCING RIBS

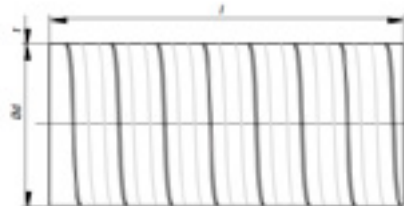

## PRESSURE DROP DIAGRAM

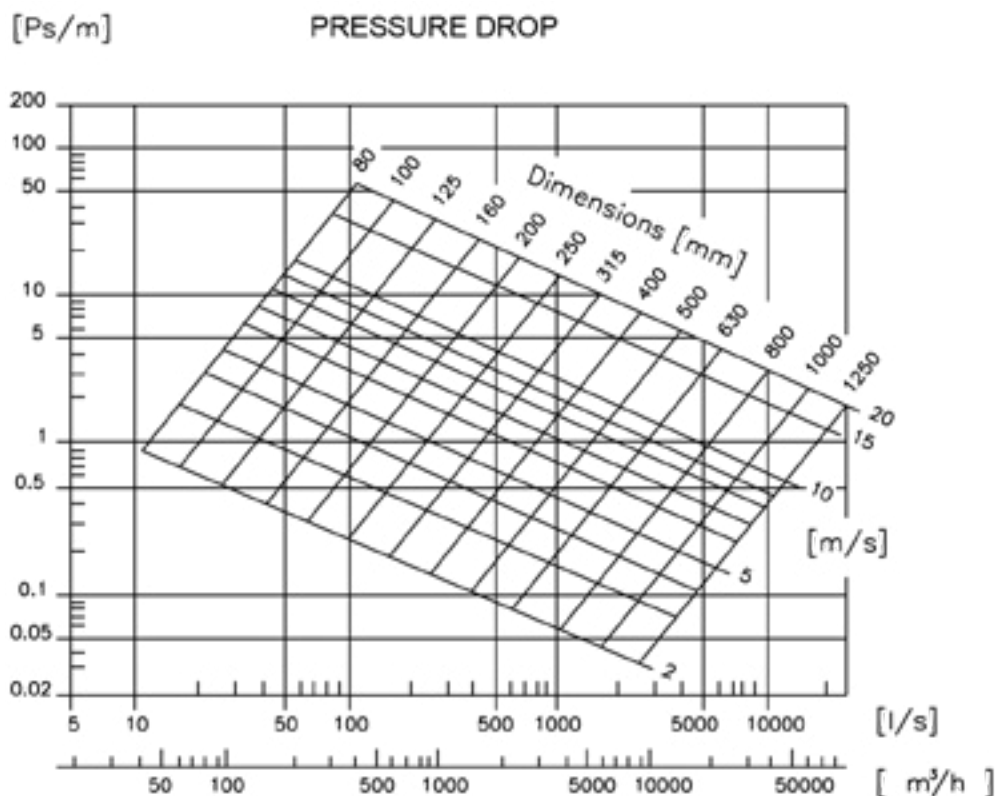

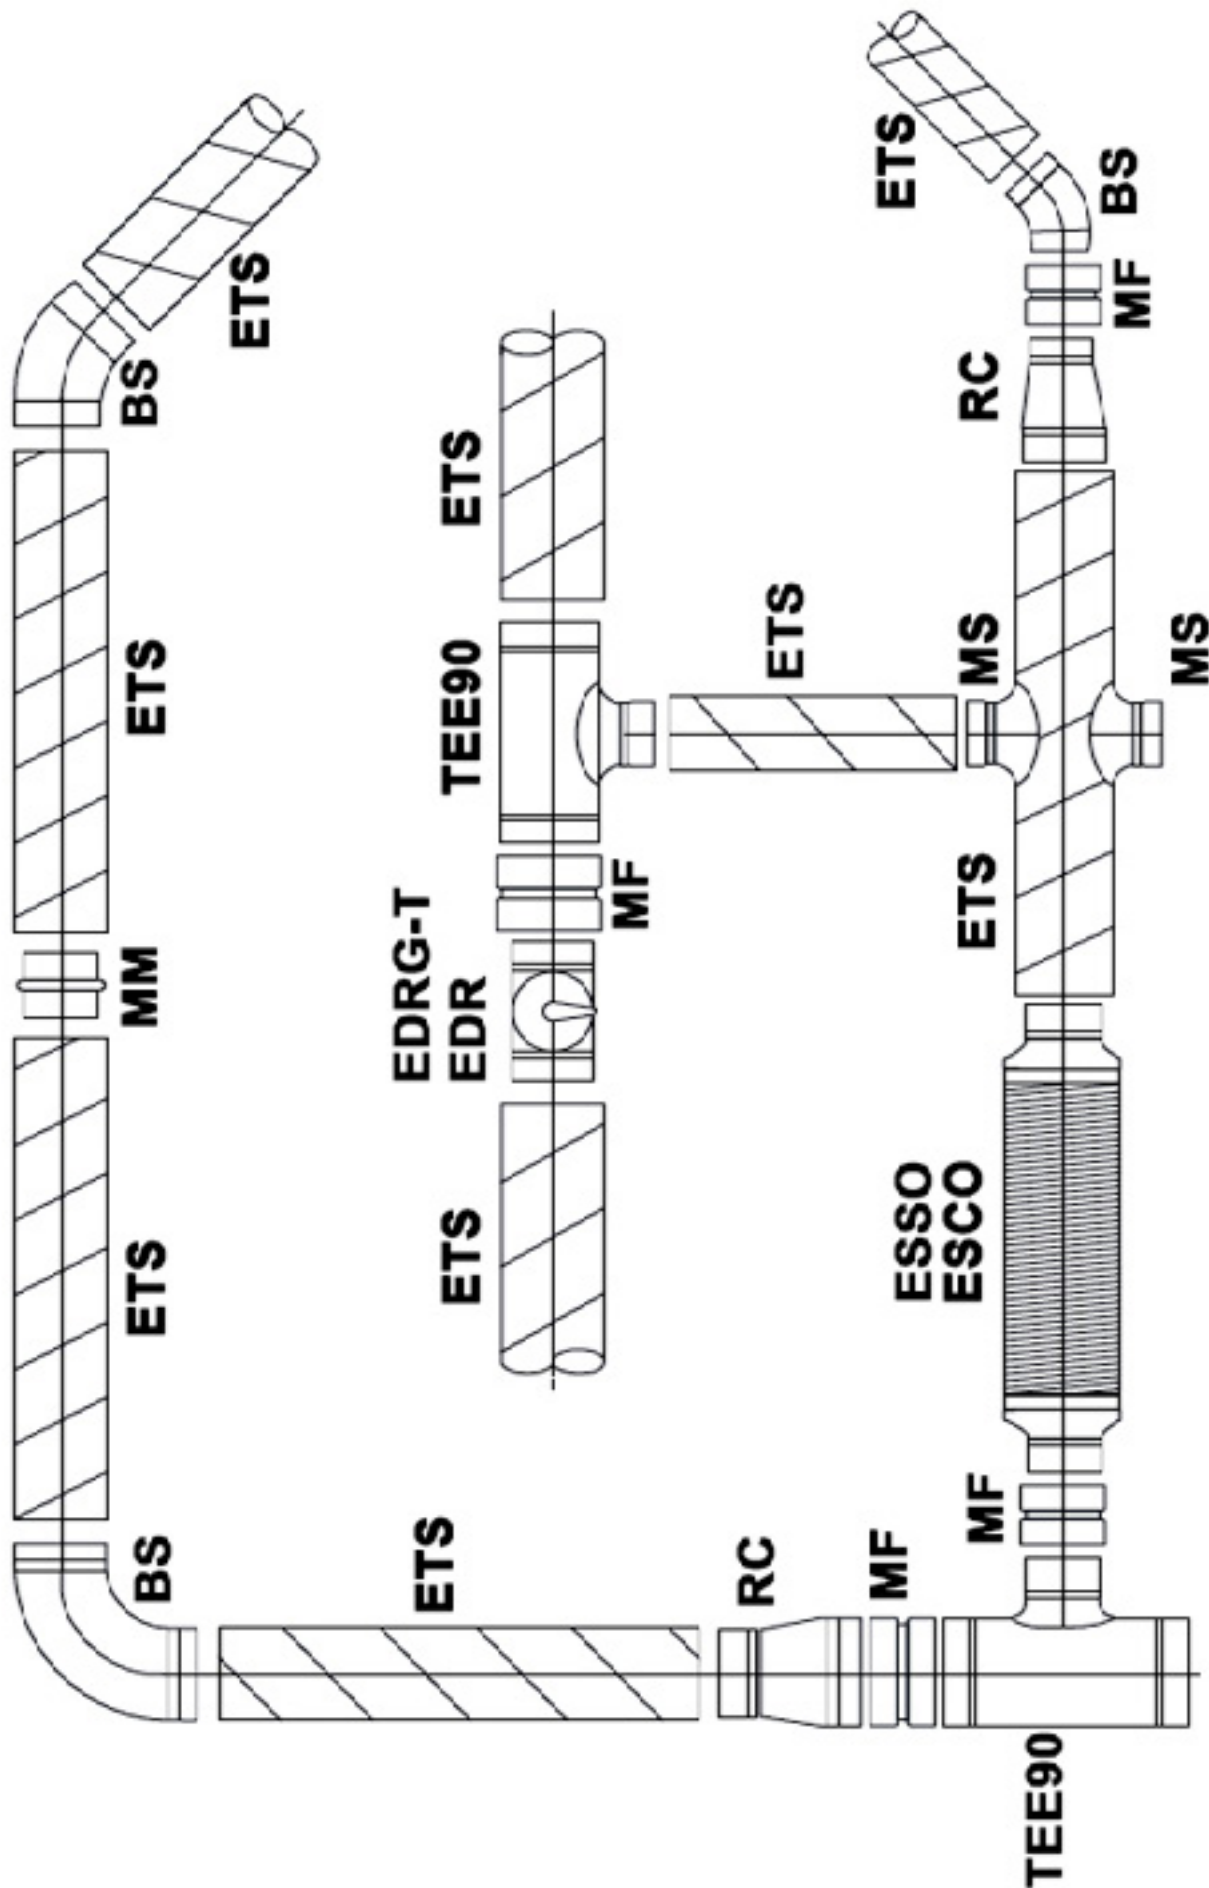

# CODE

## How to order

<b>ETS</b>	<b>80</b>	<b>1000</b>
------------	-----------	-------------



**ETS**  
Galvanized metal sheet spiro  
duct

**DIAMETER**

- 80
- 100
- 125
- 150
- 160
- 200
- 250
- 300
- 315
- 355
- 400
- 450
- 500
- 560
- 630
- 710
- 800
- 900
- 1000
- 1120
- 1200
- 1250

**LENGHT**

- 1000
- 2000
- 3000



**Head quarter**

**ECOCLIMA SRL**  
Via Caduti di Russia, 19  
35010 Curtarolo - PADOVA - ITALY  
P. +39 049 9620344  
info@ecoclima.com

**Sales office Italy**  
info@ecoclima.com

**Sales office international**  
francesca@ecoclima.com

ecoclima.com    



ISO 9001  
ISO 50001  
ISO 45001  
ISO 14001

Certified Management System