


EGS Moulded grilles for air extraction



Description

Moulded grilles for air extraction or supply made of grey painted steel (similar to RAL 9006).

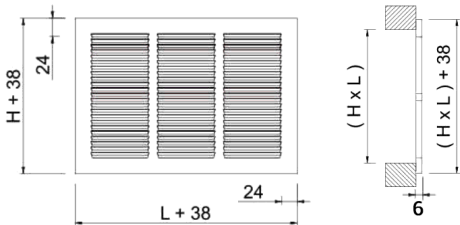

Use

EGS series grilles have been designed to be used in air conditioning, ventilation and heating systems. They are used for air supply and exhaust in large areas, car parks or domestic installations.

Operating Data

- V_k : effective speed (m/s).
- m^3/h : flow rate.
- Pa: pressure drops in Pascal.
- dB(A): noise level.

All dimensions are expressed in mm

Models LxH	Effective Section	Flow Rate (m^3/h)			
	m^2	V_k 2 m/s	V_k 3 m/s	V_k 4 m/s	V_k 5 m/s
200x100	0,014	100	150	200	250
300x100	0,021	151	227	302	378
400x100	0,029	209	313	418	522
150x150	0,017	61	122	183	245
300x150	0,033	238	356	475	594
400x150	0,044	317	475	633	792
200x200	0,029	209	313	418	522
300x200	0,043	310	465	620	774
400x200	0,058	418	626	835	1044
300x300	0,065	468	702	936	1170
400x300	0,087	626	940	1253	1566
Pa		3	6	10	15
dB(A)		20/25	25/30	30/35	35/40

Price List

Models LxH	EGS
	Eur
100x100	12,94
200x100	19,21
300x100	25,14
400x100	31,14
150x150	21,74
200x150	25,59
300x150	32,93
400x150	40,60
200x200	30,36
300x200	39,27
400x200	50,03
500x200	60,86
300x300	53,15
400x300	67,81
500x300	80,81
600x300	94,81
400x400	99,36