

EVRP Helicoidal fans wall ø 200 to ø 400



Description

Helicoidal fans with wall painted panel, single-phase motor and fan with 5 blades .

Characteristics

Material: all the components are in painted steel. Air flow: from the motor to the fan.


use

Installazione a parete, utilizzato in tutte le applicazioni che richiedono basse portate d'aria senza perdita di carico.


Accessories

- REB-1 - Speed regulators;
- S-EVRP - Pressure relief dampers.

EVRP 200-250-300-350

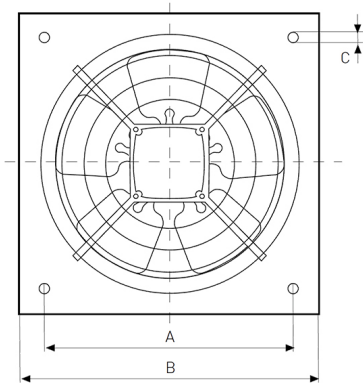

EVRP 400

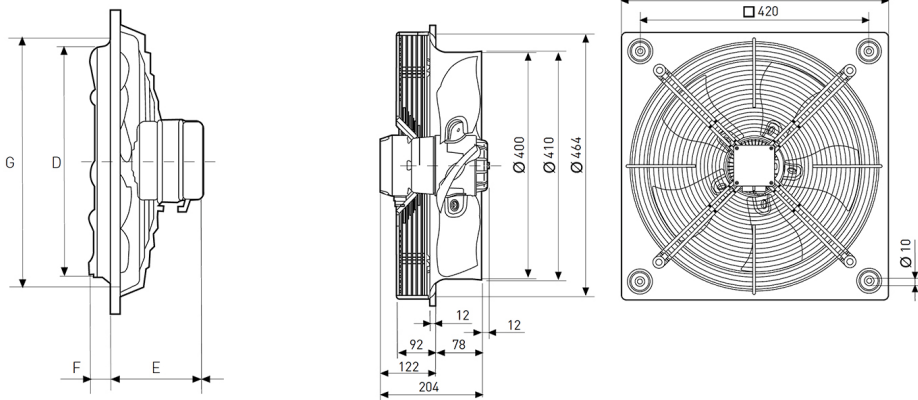

Dimensions

all measurements are in mm

Models	□A	□B	ØC	ØD	E	F	ØG
200	222,5	266	9,5	205	88	19,5	211
250	275,5	333	9,5	255	99	31,5	261
300	336,5	400	10,5	305	99	35,5	311
350	390,5	465	10,5	361	106	34,5	371

Operating Data

dB (A) : noise index

* Livello di pressione sonora misurato a 1,5 metri in campo libero.

Models	Velocity (r.p.m.)	Outlet Diameter (mm)	Maximum Power Consumption (W)	Maximum Current Draw (A)	Acoustic Pressure Level* (dB(A))	Maximum Airflow m³/h	Operating Temperature (°C)		Weight kg
							Min.	Max.	
200	1345	200	16	0,08	41	505	-15	+40	1,8
250	1340	250	22	0,10	46	765	-15	+40	2,4
300	1320	300	34	0,15	46	1125	-15	+40	3,2
350	1360	350	40	0,17	51	1475	-15	+40	4,3
400	1255	400	151	0,7	56	3670	-40	+60	9,0

Price List

Models	Ventilatore	REB-1 - Regulator	S-EVRP - Overpressure Dampers
	euro	euro	euro
200	338,33	210,71	130,07
250	400,57	210,71	147,32
300	524,09	210,71	164,94
350	686,55	210,71	164,94
400	1.139,47	210,71	177,98