

EGFLC EGFPCL Perforated grille for plasterboard



Description



Perforated face grille complete with plenum box for concealed installation on plasterboard walls.
The grille is available with 1, 2 or 3 connections:
- EGFLC with side spigot
- EGFPCL with rear spigot

Notes

The dimensions of the plenum box with rear spigot are the same of the plenum box with side spigot

Characteristics

Robust plenum box in white painted steel. Perforated face aluminium grille, white painted, extractable and with magnetic coupling to let an easy inspection and sanitization.
Plastic connections for HTPCL PLUS 63 (internal diameter 63 mm and external 75 mm).

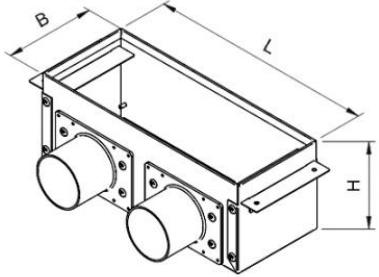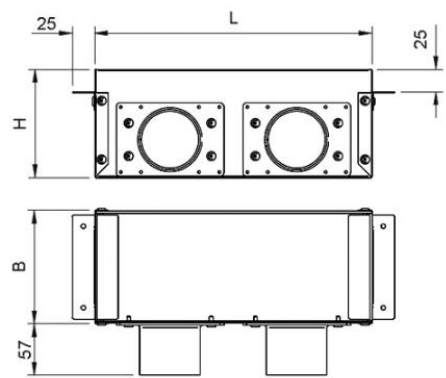

airflow m ³ /h	EGFLC EGFPCL 1212	filter EAFI 1212
	Pa	Pa
10	10	6
15	10	8
20	10	10
25	12	12
30	15	15
35	19	18
40	25	21
45	35	25

airflow m ³ /h	EGFLC EGFPCL 312	filter EAFI 312
	Pa	Pa
40	10	8
45	10	9
50	10	10
55	10	11
60	11	12
65	12	13
70	13,5	14
75	15	15
80	17	16
85	19	17
90	21	18

airflow m ³ /h	EGFLC EGFPCL 412	filter EAFI 412
	Pa	Pa
60	6	8
70	7	10
80	8	12
90	9	14
100	10	16
120	13	17
140	16	18

Airflow and price list

Dimensions and price list

Item normally available
from stock

model	nominal dimensions	connection no.	recommended airflow m ³ /h	max airflow m ³ /h	EGFLC	EGFPC	filter EAFI
					euro	euro	euro
1212	120 x 120 x 120 (H)	1	10 - 35	45	a.r. ▾	a.r. ▾	19,20 ▾
312	300 x 120 x 120 (H)	2	35 - 70	90	a.r. ▾	a.r. ▾	19,20 ▾
412	400 x 120 x 120 (H)	3	60 - 120	140	a.r. ▾	a.r. ▾	19,20 ▾